

徐工徐工 助您成功  
XCMG FOR YOUR SUCCESS



# XGC130-I 履带起重机

CRAWLER CRANE



地址(Add): 中国江苏省徐州市金山桥经济开发区桃山路19号 邮编(Postal Code): 221004  
No.19 Taoshan Road, Economic development zone of jinshanqiao,Xuzhou,Jiangsu Province,China  
统一服务热线(Unified service hotline): 86 400-110-9999  
销售热线Sales Hotline  
销售电话(Sale Tel): 86 0516-87892094  
销售传真(Sale Fax): 86 0516-87892074  
电子邮件(E-mail): jjyxd@xcmg.com  
服务质量投诉电话  
(Quality Supervision Tel): 86 0516-87892587

服务热线Service Hotline  
服务电话(Service Tel): 86 400-001-5678  
服务传真(Service Fax): 86 0516-87892080  
备件电话(Service Tel): 86 0516-87892086  
备件传真(Service Fax): 86 0516-87892083



欢迎访问徐工商城  
省心更省钱一站式



欢迎关注徐工履带起重机官方微信  
1. 直接扫码“XCMG\_xgj”添加好友  
2. 查找公众账号“徐工履带起重机”  
3. 直接扫描上方二维码





# CONTENTS

## 目录

P02	<ul style="list-style-type: none"> <li>• 产品亮点 Product Highlights</li> <li>• 主要技术参数 The Main Technical Parameters</li> <li>• 详细介绍 Brief Introduction</li> <li>• 自拆装 (选配) Self Assembly &amp; Disassembly(Optional)</li> </ul>
P11	<ul style="list-style-type: none"> <li>• 工况示意图 Working Mode Illustration</li> <li>• 主臂工况臂节组合 Boom Combinations</li> <li>• 主臂作业范围图 Boom Working Area</li> <li>• 主臂起重性能表 Boom Lifting Load Chart</li> <li>• 臂端单滑轮起重性能表 Boom Single Pulley Lifting Load Chart</li> </ul>
P19	<ul style="list-style-type: none"> <li>• 固定副臂臂节组合 Fixed Jib Combinations</li> <li>• 固定副臂作业范围图 Fixed Jib Working Area</li> <li>• 固定副臂起重性能表 Fixed Jib Lifting Load Chart</li> <li>• 主要零部件 Main parts</li> <li>• 工作条件及注意 Working conditions and Cautions</li> </ul>

# 02

## XGC130-I 履带起重机

### XGC130-I CRAWLER CRANE

P03-P03	产品亮点 Product Highlights
P04-P04	主要技术参数 The Main Technical Parameters
P05-P08	详细介绍 Brief Introduction
P09-P09	自拆装 (选配) Self Assembly & Disassembly(Optional)



## 01 运输、拆装优化设计

### Optimized design of transport and assembly/disassembly

- 配置齐全自拆装系统（选配），可轻松实现：后配中央配重自拆装、履带梁自拆装和主臂底节臂自拆装。  
Fully equipped self-assembly/disassembly system (Optional) can easily achieve: rear counterweight self-assembly/disassembly, track frame self-assembly/disassembly, and boom base self-assembly/disassembly.
- 最大单件运输重量控制在33吨内，运输宽度不超过3米，能够满足全球无障碍运输要求。  
Largest single unit transport weight is controlled within 33t, transport width not more than 3m, so as to meet the transport requirement of global accessibility.
- 臂架套装运输设计，最大化利用运输空间，节省运输成本。  
Tower jib and fixed jib can be three-piece integrated transport, and transport design of inserted boom sections, maximize the use of transport space, and save transport costs.

## 02 结构设计更优化


### More optimized structural design

- 上车采用大箱型结构设计，承载能力强、重量轻、刚性好。  
Superstructure is a large box-type structural design, with heavy load bearing capacity, light weight, and good rigidity.
- 副起升卷扬置于主臂底节臂，转台布置宽松，维护保养方便。  
Auxiliary hoisting winch is placed in boom base, with relaxed arrangement for turntable, easy maintenance.

## 主要技术参数 The Main Technical Parameters

项目Items		单位Unit	数值Data
最大额定起重量 Max. rated lifting capacity	基本型主臂 Basic boom	t	130
	固定副臂 Fixed jib	t	18.2
最大起重力矩 Max. load moment		t·m	702
主臂长度 Boom length		m	19~76
主臂变幅角度 Boom elevating angle	主臂工况 Boom working condition	°	30~82
	固定副臂工况 Fixed jib working condition	°	83
固定副臂长度 Fixed jib length		m	13~25
起升机构最大单绳速度(空载、第四层) Winch mechanism max. single line speed (no load, at 4th layer)		m/min	110
主臂变幅机构最大单绳速度(空载、第五层) Boom elevating mechanism max. single line speed (no load, at 5th layer)		m/min	75.6
最大回转速度 Max. slewing speed		r/min	1.4
最高行走速度 Max. traveling speed		km/h	1.3
爬坡度 Grade ability		%	30
平均接地比压 Average ground pressure		Mpa	0.094
发动机功率 Engine power		kW	200
整机质量(100T吊钩, 全配重, 19米臂) Mass of the vehicle as a whole (including main hook block and 19m boom)		t	121.1
运输状态单件最大质量 Max. mass of single unit in travel configuration		t	32.3 (可进一步拆解至29.2t)
运输状态单件最大尺寸(长×宽×高) Max. dimension of single unit in travel configuration (L×W×H)		m	10.6x3.0x3.25

本印刷品所包含的数据，会随着产品的不断升级而改变，请以实际产品为准  
Pictures and data in this catalog will change with the update and modification of products, so please take the actual vehicle as reference.

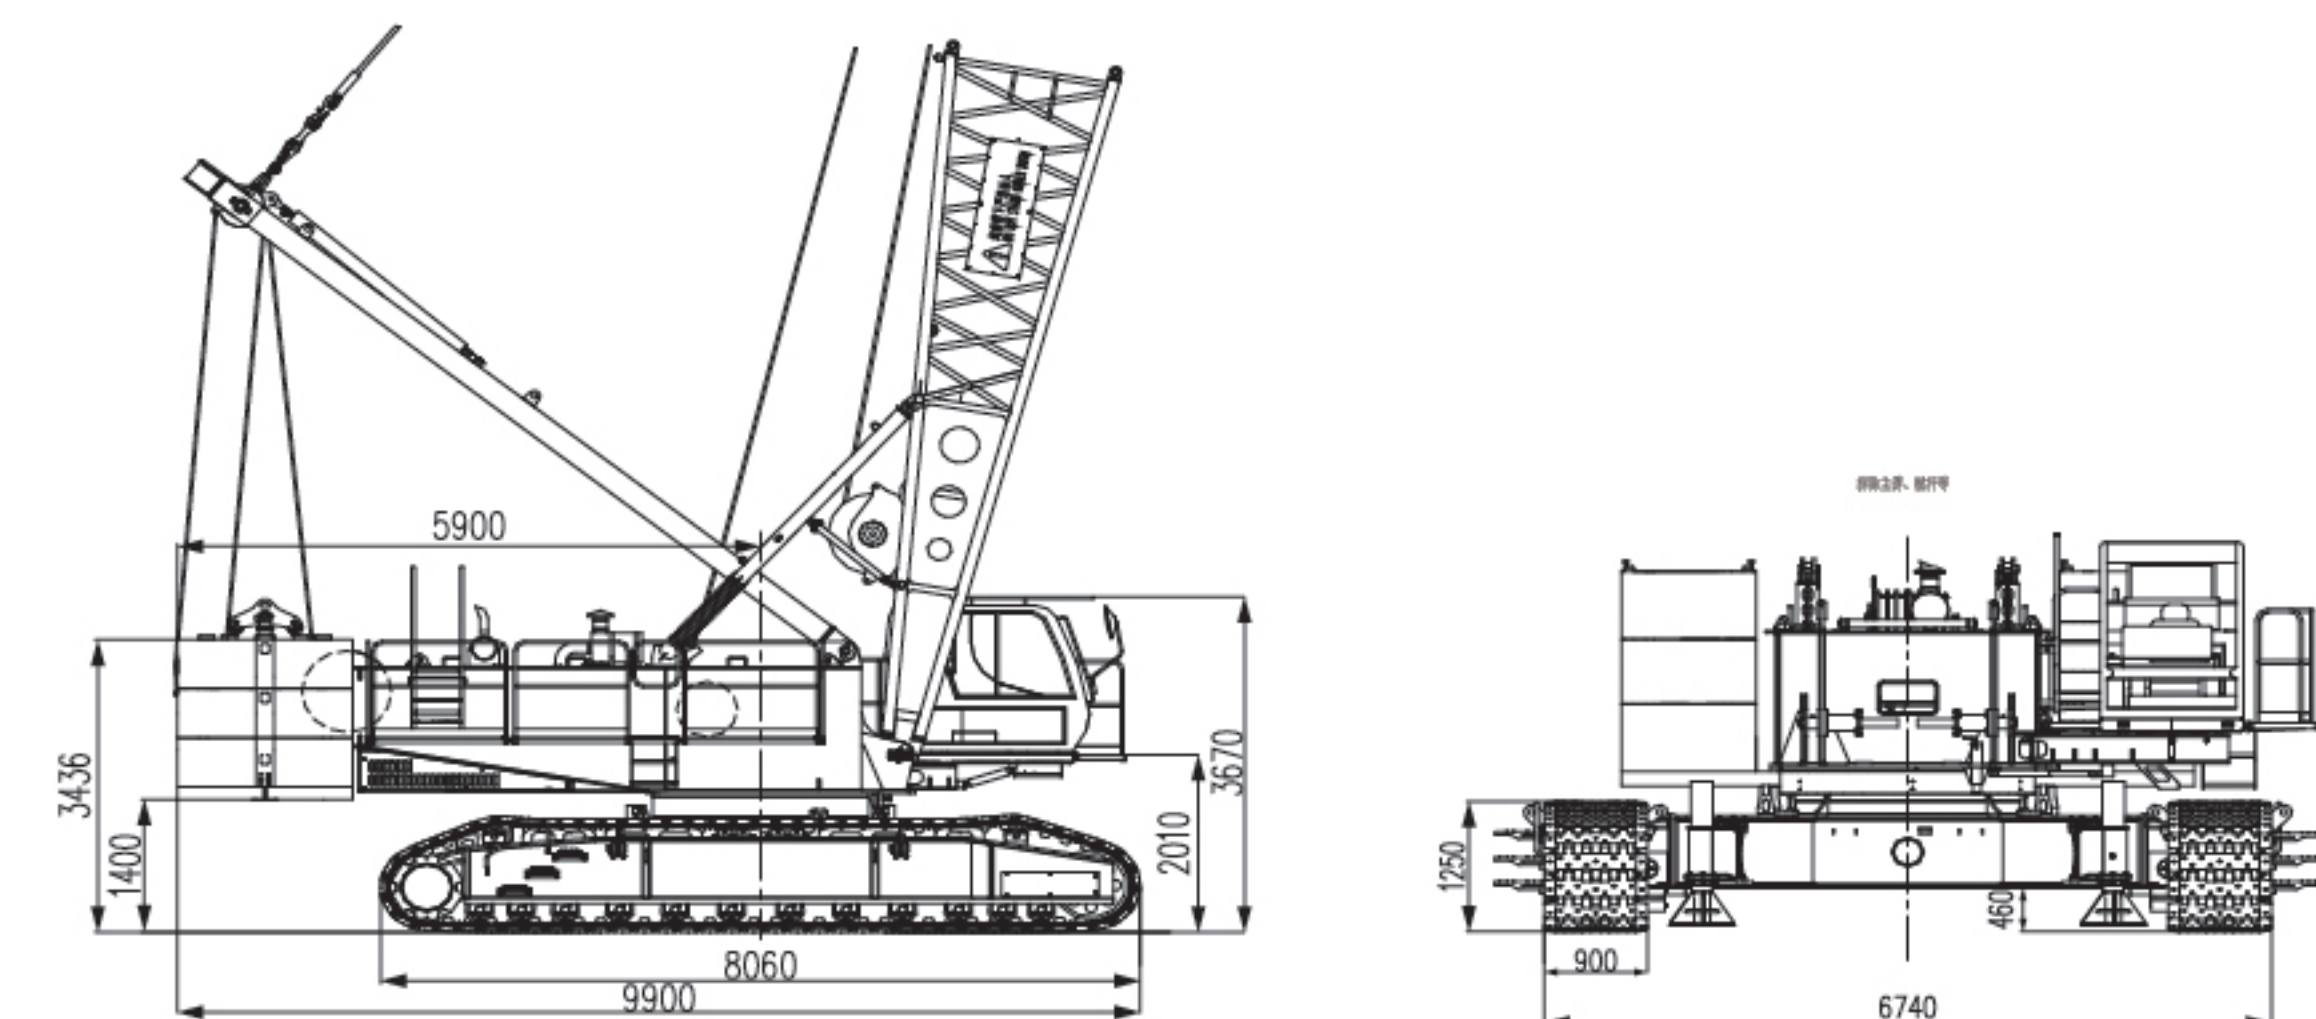



## 详细介绍 Brief Introduction

# 上车 / Crane Superstructure

### 发动机 / Engine

采用上柴发动机，额定功率 200 kW，额定转速为 1800 rpm，最大输出扭矩 1200N·m。排放符合 GB20891-2014 非道路第三阶段排放标准。

Shanghai diesel engine, rated output 200kW, rated speed 1800rpm, max. output torque 1200N.m, emission in compliance with GB20891-2014 (Stage III).

### 电气系统 / Electrical System

智能化计算机集成式可编程控制系统，是该产品的关键核心技术，采用 PLC 可编程控制器，并与常规电气相结合，完成系统的逻辑控制与液比例控制功能，实现起重机的自动控制，大大提高起重机的作业安全性、可靠性和作业效率。本机操作可通过电脑大屏幕显示出来，很方便的实现了人机对话。

Intelligent computer integrated programmable control system is the key technology of the crane. PLC programmable controller is used, in combination with conventional electrics, to realize logic control and electronic proportional control of the system, and to improve safety, reliability and efficiency for crane operation. Crane operation can be shown by a larger computer display, easy for man-machine interaction.

### 液压系统 / Hydraulic System

采用液比例控制，开闭式回路相结合，主泵为变量泵系统，采用分功率控制，无功率越权。可实现与负载无关的流量分配，具有抗流量饱和功能；发动机功率极限控制，可自动实现功率适应，有效避免发动机熄火。

液压系统组成：

起升系统，变幅系统，回转系统，行走系统，辅助安装系统。

特点：主泵具有 ΔP 调节功能，可实现主系统微动控制，

起升系统、主变幅系统，行走系统均具有高速档及微动档，操作灵敏，动作平稳。

回转采用闭式系统，响应快，控制精准，起制动、换向平稳，无冲击。可以满足频繁换向，微动。

Electronic proportional control, with combination of open/closed type circuit, main pump is variable displacement pump system, with distribution power control, no power over-ride, may realize flow distribution independent of load, and have the function of anti-current quantity saturation; engine power limit control may realize automatic power suit, efficiently avoid engine shut-down.

Hydraulic system composition: hoist system, luffing system, slewing system, travel system, and auxiliary assembly system.

Features: Main pump has ΔP regulation function, may realize main system fine motion control; hoist system, main luffing system and travel system have high speed gear and fine motion gear for sensitive operation and smooth movement. Slewing gear is closed type system, quick response, accurate control, stable starting, braking and direction change, no impact, may satisfy operation of frequent direction change and fine motion control.

### 起升机构 / Hoist Gear

主副起升机构采用内藏式行星减速机，独立驱动，主起升机构采用高强度螺栓安装在转台上，副起升机构通过销轴安装于主臂底节臂上，以减轻主机运输重量。主起升机构还可选配自由落钩功能。减速机安装有片式常闭制动器，安全可靠。采用溅油方式润滑，无需维护保养。起升机构还具有换油方便、低噪音、高效率、长寿命等特性。起升机构最大单绳速度可达 110m/min，同时具有优良的微动性能。

Main/auxiliary winch has built-in planetary speed reducer with independent drive, and oil supplied by combination of two pumps, main hoist winch is installed with high-strength bolt on turntable and auxiliary hoist winch installed with pin shaft on boom base to reduce basic machine transport weight. Speed reducer has disc type constant closed brake with oil-bath lubrication for safe and reliable work without maintenance. Hoist winch also features easy oil change, low noise, high efficiency and long service life. Hoist winch max. single line speed is 110m/min, with good fine speed performance.

### 变幅机构 / Luffing Gear

主臂变幅机构为单联卷筒独立驱动，与转台采用销轴连接。主臂变幅机构采用内藏行星式减速机，片式常闭制动器。卷筒设有棘轮锁止装置，以实现机械制动，安全可靠。

Boom luffing gear is a twin drum independent drive unit, fixed on turntable tail with high-strength bolt; Boom luffing gear has built-in planetary speed reducer and disc type constant closed brake. Winch drum has a ratchet locking device to realize mechanical braking, safe and reliable. Boom luffing gear is connected with turntable by pin shaft, easy for assembly.

### 回转机构 / Slewing Gear

回转机构布置在转台内侧前面，定量马达驱动，回转减速机采用常闭片式制动器，带偏心机构，用于调整回转支承和减速机的啮合间隙。回转机构具有液压缓冲、自由滑转及在长臂重载下自动减速功能，保证了回转机构工作的安全性、可靠性及维修方便性。

Slewing gear is arranged inside the front of turntable, made up by two planetary reducers, and internal meshed with slewing ring, has the function of hydraulic buffering and free-swing. The controllable constant closed disc type brake is reliable for work and easy for maintenance.

### 回转支承 / Slewing Ring

采用三排滚柱或双排球式回转支承，质量稳定可靠。

Slewing ring is a 3-row roller or 2-row ball type slewing bearing, with stable and reliable quality.

### 主机平衡重 / Counterweight

主机平衡重可进行自拆装（选配），与转台的连接增加了销轴油缸，消除了平衡重在拆装过程中的安全隐患。

主机平衡重共重 45t，包括：

平衡重托盘 15t/件 共 1 件

平衡重 I 5t/件 共 6 件

车身平衡重 3t/件 共 2 件

Counterweight has self assembly/disassembly (optional), and a pin shaft cylinder is added for connection with turntable, eliminated the hidden danger for safety of counterweight assembly/disassembly.

Counterweight is 45t, includes:

Counterweight tray 15t/piece, total 1 piece;

Counterweight I 5t/piece, total 6 pieces;

Car-body Counterweight 3t/piece, total 2 pieces;

### 操纵室 / Operator's Cab

操纵室采用钢制框架结构，正面配置有整体式夹层玻璃，其余玻璃均为钢化玻璃。装有可调式座椅、按人机工程学布置的全套操纵仪表和控制装置，配置风道式冷暖空调、音响、灭火装置、闭路监视系统等，宽敞舒适。工作时，操纵室可调整俯仰角度，扩大视野，方便操作；运输时，操纵室可从侧方转到前方，减小运输宽度。

Operator's cabin is steel frame structure, the front windshield is provided with overall sandwich glass, other glass is all hardened glass, equipped with adjustable seat, ergonomic designed instruments and control devices, air-conditioner, CD player, fire extinguisher, closed circuit monitor and etc., spacious and comfortable. When working, the cabin's angle can be adjusted to enlarge the view field; when traveling, the cabin can be turned from the side to the front in order to reduce the transport width.

### 转台 / Turntable

转台采用高强度钢板焊接而成，整体结构型式采用大箱形框架式等强度梁结构，两侧工字形主立板用箱形梁左右联接。

该结构的优点为整体抗弯、抗扭能力强，稳定性好，转台内空间较大，有利于保养及维护。

转台通过回转支承与下车联接。转台上安装有驾驶室、起升机构、变幅机构、发动机、桅杆、臂架及配重等重要部件。

Turntable is large box type structure welded by high-strength steel, with both side "工" type upright plate connected with box type beam at left and right.

The structure advantage is strong overall tensile strength, good stability and large inside space, helpful for maintenance.

It connects with the undercarriage through slewing ring, operator's cabin, winch system, luffing system, engine, mast, boom and counterweight etc. respectively arranged on the turntable at different positions.

# 下车 / Crane Carrier

下车包括车架、履带架、行走机构和车身配重。车架和履带架采用销轴连接。Crane carrier comprises car-body, track frame, and propel unit. Car-body and track frame take pin shaft connection.

### 车架 / Car-body

车架采用高强度钢板、箱形结构，中间设置横隔板，加强其抗扭刚度，结构简单，承载能力强，刚性好。

Car-body is made of high-strength steel and welded in box type structure, with cross panel installed in the middle to strengthen its stiffness against torsion, simple structure, high loading capacity and well rigidity.

### 履带架 / Track Frame

包括履带梁和四轮一带。履带梁采用箱形结构，和车架连接部位局部加强，中间设置横隔板。两个履带架对称布置。四轮一带采用高强度合金铸钢铸造而成，履带板宽度为 0.9m。履带架上安装有销轴油缸，用桅杆上的辅助安装油缸（选装件）可方便实现履带架的自拆装。

Crawler travel unit consists of track frame, track shoe, drive sprocket, idler roller, track roller and travel motor. Track frame is box-type structure, connected with frame and strengthened partially, and cross panel is installed in the middle of it. Two track frames are symmetrically arranged. The four-roller and one-track are made of high-strength alloy casting steel. The track shoe width is 0.9m. On track frame installed pin shaft cylinder, with assistant cylinder on mast, easy for track frame self assembly and disassembly.

### 行走机构 / Crawler Travel Unit

行走机构采用内藏式行星齿轮减速机、轴向柱塞式变量马达驱动，减速机带有液压释放行走制动器，安全可靠。左右两套行走机构可同步操作，也可单独操纵，以实现直行和转弯。

Crawler travel unit uses built-in planetary gear reducer and axial piston variable displacement motor, the reducer has hydraulic release service brake, safe and reliable. Two crawler travel units at left and right can be operated not only synchronously but also independently to realize straight drive and turning around.

### 行走速度 / Travel Speed

变量马达可以实现无级变速，最高速度 1.3 公里/小时。行走时，设备运行平稳，可实现快速行走。

Variable displacement motor can realize infinitely variable speeds, with max. speed 1.3 km/h, travel stable and fast.



## 详细介绍 Brief Introduction

### 作业设备 / Lifting Operation Parts

作业设备包括主臂、固定副臂、桅杆、吊钩等。

The lifting operation parts devices comprise: boom, fixed jib, luffing jib, mast, hook block

#### 主臂 / Boom

主臂由底节臂、顶节臂和中间节组合而成，主臂为空间桁架式结构，底节臂、顶节臂为锥形变截面结构，顶节臂可联接固定副臂和臂端单滑轮机构，中间节为等截面结构。主臂用高强度优质钢管焊接而成，臂架顶部与根部用钢板加强，以利于传递载荷。主臂长度为 19 ~ 76m。  
组成：底节臂 9m、中间节臂 3m×1、中间节臂 6m×1、中间节臂 12m×4、顶节臂 10m。

Boom comprises boom base, boom top and boom insert, with lattice type structure; boom base and boom top are tapered variable section, and boom top may be connected with fixed jib and single top, boom insert is variable section. Boom is welded by high-strength steel tube, boom top and boom foot are reinforced by steel plates for load transfer. Boom length is 19 ~ 76m.

Composition: boom base 9m, boom insert 3m×1, boom insert 6m×1, boom insert 12m×4, boom top 10m.

#### 固定副臂 / Fixed Jib

主臂长 31 ~ 64m 范围内可安装固定副臂进行作业，固定副臂长度组合为 13 ~ 25m，与主臂间的安装角分为 15° 和 30° 两种。  
组成：底节臂 6m、中间节臂 6m×2、顶节臂 7m。

Fixed jib can be attached and operated within the range of boom length 31m ~ 64m, fixed jib length combination is 13m ~ 25m, with two offset angle of 15° and 30°.

Composition: jib base 6m, jib insert 6m×2, jib top 7m.

#### 桅杆 / Mast

桅杆为箱形双臂结构，具有良好的整体稳定性。桅杆上安装有辅助拆装油缸，用于臂架及履带架自拆装，也可用于其它辅助吊装。

Mast is box-type structure of two limbs with good overall stability, and installed assistant cylinder for self assembly/disassembly of boom, track frame, and also for other auxiliary parts lifting.

#### 吊钩 / Hook Block

标准配置：100t吊钩、80t吊钩、32t吊钩和13.5t吊钩，另有130t吊钩可供选配。

Standard: 100t capacity hook block, 80t capacity hook block, 32t capacity hook block, 13.5t capacity hook block and 130t capacity hook block (Optional).

### 安全装置 / Safety Devices

安全装置包括：力矩限制器、主副提升防过卷装置、主副提升防过放装置、变幅棘爪装置、起重臂角度限位、主副臂防后倾系统、示高灯、风速仪、电子水平仪、防雷击系统、蜂鸣器及警示灯、功能互锁、故障自诊断系统及黑匣子功能、断电保护等。

The safety protection devices comprise: load moment limiter, main/auxiliary winch over-wound protection, main/auxiliary winch over-release protection, winch ratchet locking device, boom angle limit, boom/jib backstop system, height mark lamp, anemometer, level gauge, lightning proof system buzzer and warning lamp, two-way hydraulic lock, self diagnosis, black box and power cut-out protection.

#### 力矩限制器系统 / Load Moment Limiter

检测功能：力矩限制器能自动检测出起重臂的角度、起重载荷大小。  
显示功能：实时的显示当前实际载荷，工作半径，起重臂角度和当前风速。  
警示功能：如果检测到实际载荷超过额定载荷，起重臂超过极限角度，力矩限制器发出报警并限制当前动作。

Detection function: automatically detect boom angle and lifting load.  
Display function: real time display current actual load, working radius and boom angle.

Warning function: automatically send out warning signal and stop crane operation when detecting actual load exceeding rated load and boom out of limit angle.

#### 主、副提升防过卷装置 / Main/Auxiliary Winch Over-wound Protection Device

当主、副卷扬上升到最大高度时，高度限位检测开关起作用，显示器中过卷保护指示灯亮，同时禁止卷扬起升动作。

When main/auxiliary winch hoists up to a certain lifting height, an over-wound warning lamp on instrument panel lights on, at the same time, load moment limiter stops crane hoisting up operation.

#### 主、副提升防过放装置 / Main/Auxiliary Winch Over-release Protection Device

当主、副提升卷扬过放时，安装在卷筒内部的三圈保护开关检测到卷筒上的钢丝绳剩下三圈，仪表板上的指示灯亮，同时禁止卷扬落动作。

A rope-end limiter is set on main and auxiliary hoist winch to protect wire rope from over-release, when only three turns of rope left on the drum, it stops drum hoisting down, and at the same a warning lamp on instrument panel lights up.

#### 棘爪锁止装置 / Winch Ratchet Locking Device

该功能用于锁定变幅卷扬，起重臂降落时必须打开该装置，否则不能降落，用于保护臂架在非工作时安全停放。

Winch drum has a ratchet locking device, and it must be turned on when lowering boom, otherwise boom cannot be lowered. The device is used to stow the boom for safety.

#### 起重臂角度限制 / Boom Angle Limit

起重臂角度限位是由力矩限制器和安装在臂架上的行程开关双重控制的，主臂达到 83° 时，控制系统将自动停止主臂的起臂动作，主臂仰角达到 30° 时，控制系统将自动停止主臂的落臂动作，同时蜂鸣器发出声音报警。

Boom angle limit is controlled by load moment limiter and hoist limit switch on boom. When boom angle is more than 83°, the boom control system stops boom raising. When boom angle is less than 30°, the boom control system stops boom lowering, and at the same time buzzers give a sound warning.

#### 主副臂防后倾系统 / Boom / Jib Backstop System

主臂、副臂上安装有防后倾装置，当主副臂有后倾趋势时，防后倾装置可提供足够的防后倾力防止臂架后倾。

Boom and jib is installed a backstop device, when boom and jib have backwards tilting, the backstop device may provide enough support to prevent boom and jib from tilting backwards.

#### 闭路监视系统（选配） / Closed Circuit Monitor System (Optional)

司机通过安装在桅杆上的摄像头和监视器，可即时观察起升机构、变幅机构的工作情况。

The operator's cabin has closed circuit monitor system, through the camera and monitor installed on turntable tail and boom, operator can keep watch on hoist winch and luffing gear working situation.

#### 声光报警器 / Audio/Video Alarm

在履带起重机移动或做回转动作时，警告灯闪烁并且发出声音报警。

When crawler crane is moving and slewing, there is light and sound for warning.

#### 三色力矩报警灯 / Tricolor Warning Lamp

由三种颜色组成，负载在 90% 以下时“绿灯”亮，表示起重机在安全区域运行，负载在 90%-100% 的时候“黄灯”亮，表示起重机在已接近额定载荷范围，负载在 100% 以上时，“红灯”亮，表示起重机已经超载，在危险区域，控制系统自动切断起重机向危险的方向运行。

The lamp comprises 3 colors, when crane loading is below 90% of total rated lifting load, "Green Lamp" lights on to indicate crane is running in safety area; when crane loading is in 90% ~ 100% of total rated lifting load, "Yellow Lamp" lights on to indicate crane is close to total rated lifting load; when crane loading is above 100% of total rated lifting load, "Red Lamp" light on to indicate crane is overload; In dangerous area, control system can automatically cut off crane movement to dangerous direction.

#### 黑匣子 / Black Box

该功能可以将司机的操作及设备的运行参数记录下来，有利于分析事故原因。

The black box function is to record the operation data of operator and equipment, helpful for analysis of accident causes.

#### 照明灯 / Illumination Lamp

装置在转台前方和操纵室内，用于为夜间工作提供照明。

There are illumination lamps at front of turntable and in operator's cabin for night operation.

#### 示高灯 / Height Mark Lamp

安装在臂架顶部，作为高空警示。

Boom tip has a height mark lamp for high level operation warning.

#### 风速仪 / Anemometer

实时检测当前风速，传送到操纵室的监视器上，提醒司机操作的安全性。

Anemometer at boom head can detect current wind speed and send wind signal to a monitor in operator's cabin to alert operator for safety.




#### 水平仪 / Level Meter

配有电子（选配）和机械 2 种水平仪，可显示使用路面的倾斜程度，为操作者提供机器水平度参考。



The crane is equipped with 2 kinds of electronic and mechanical level meter, can indicate the road inclination degree, and provide operator with the machine level degree for reference.



自拆装 (选配)  
Self Assembly &  
Disassembly(Optional)

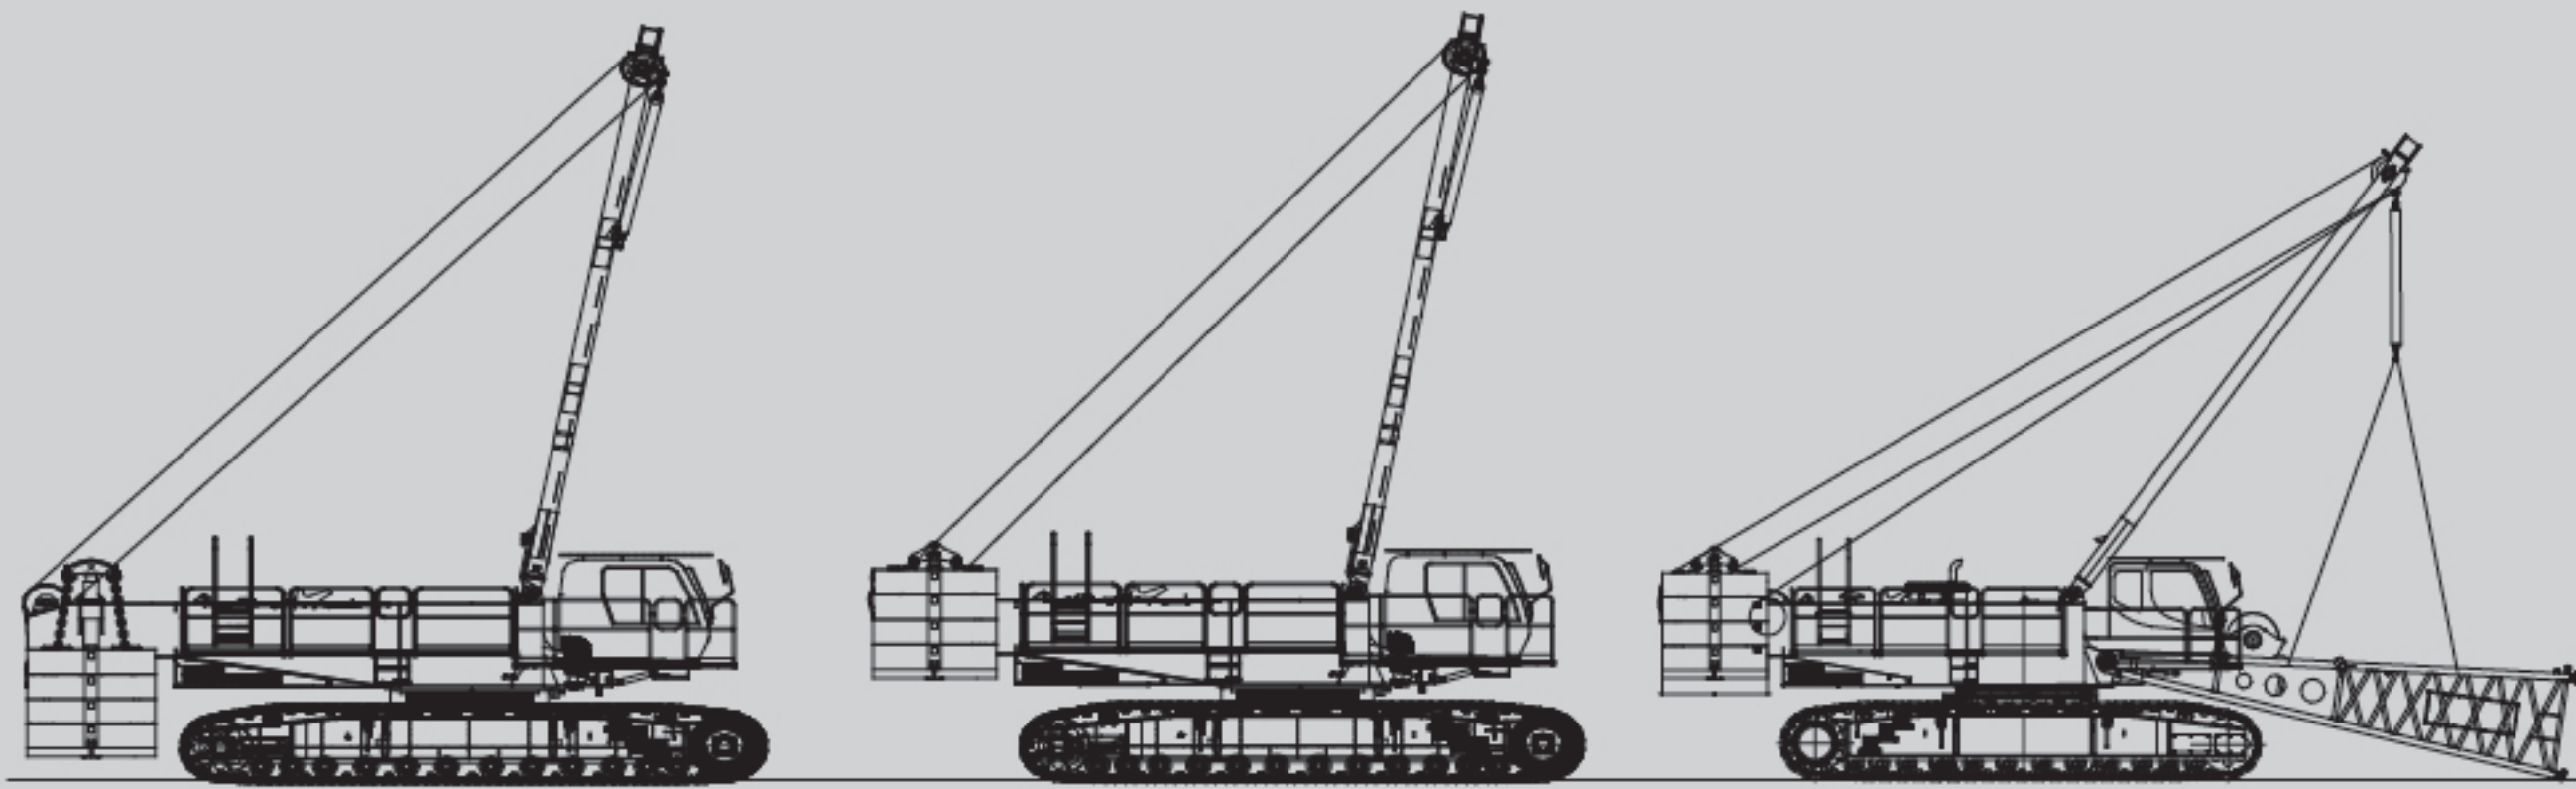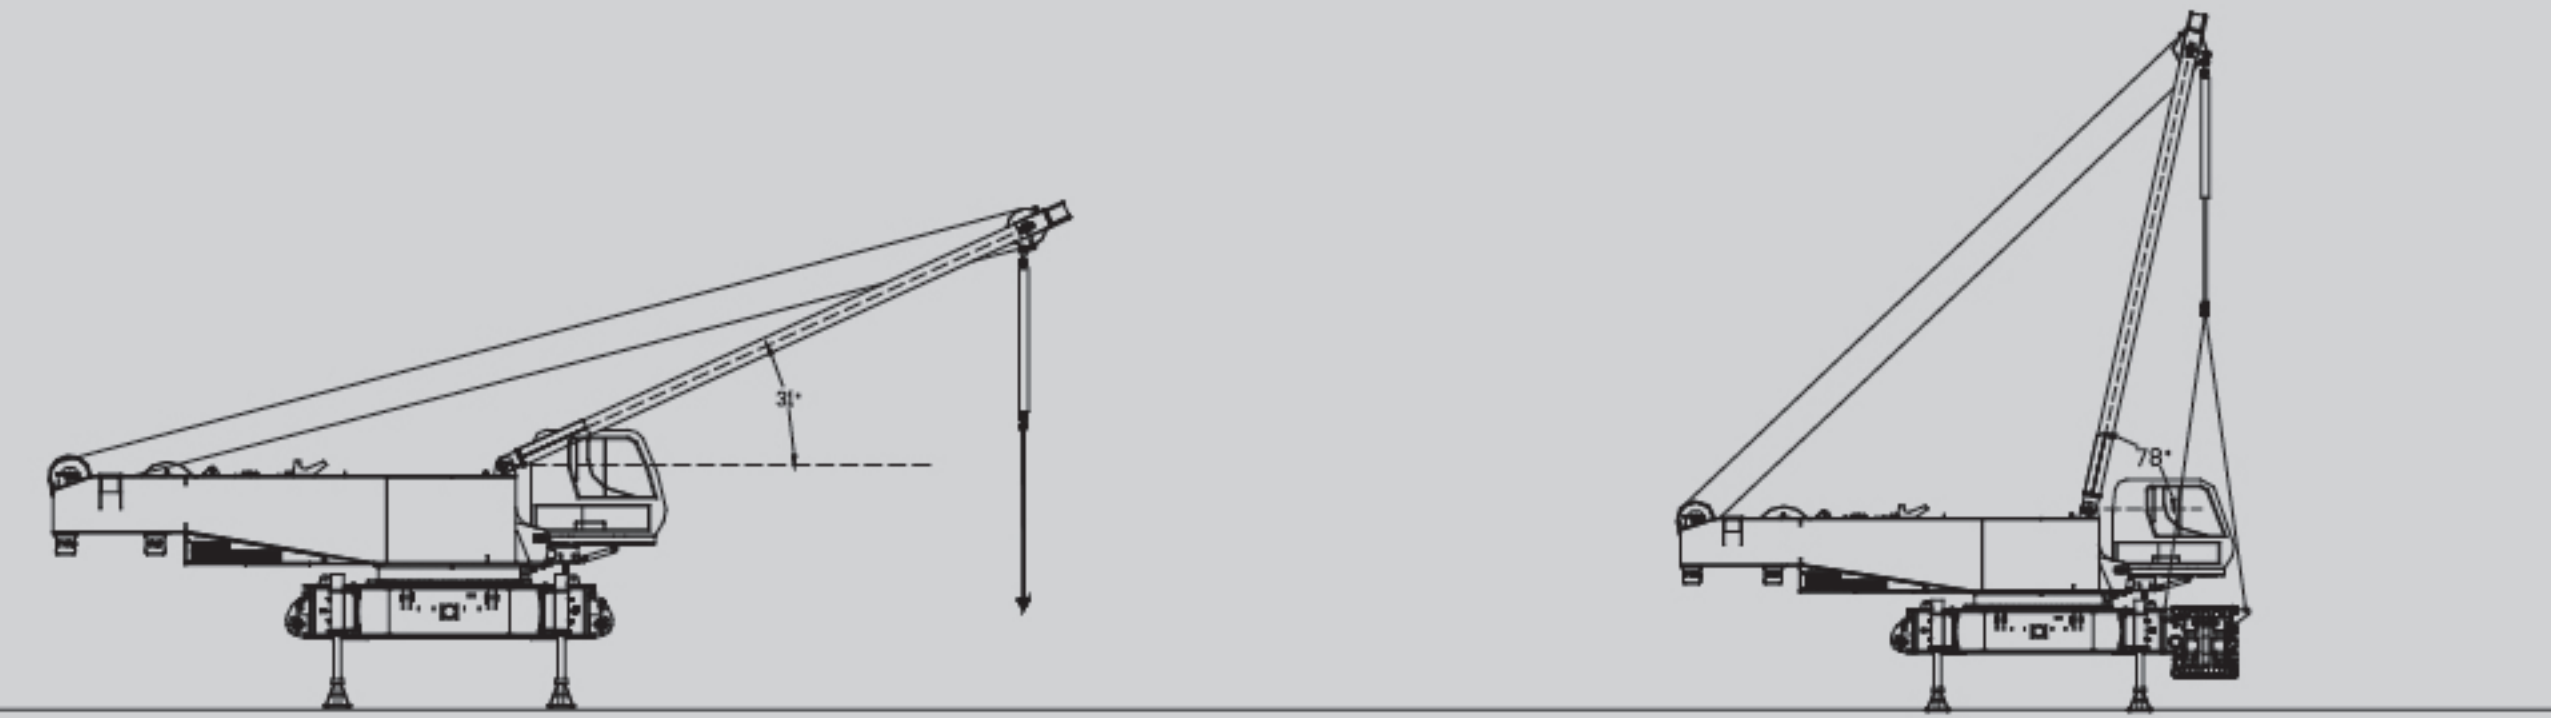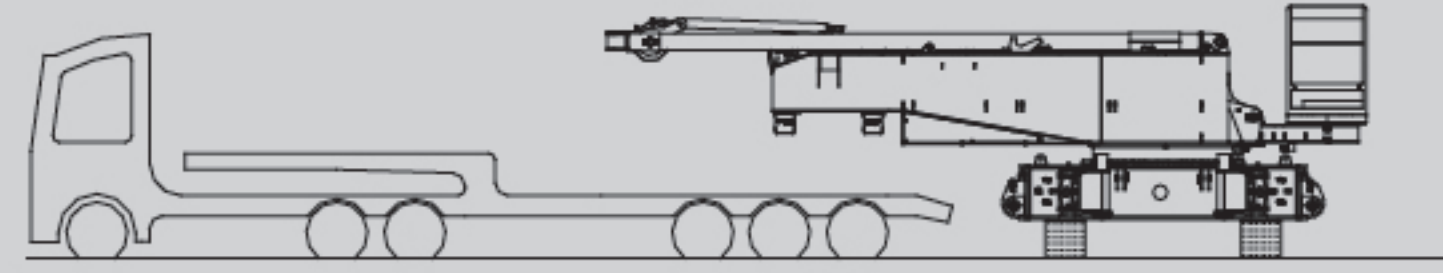

固定副臂安装示意图  
Fixed Jib Installation Illustration

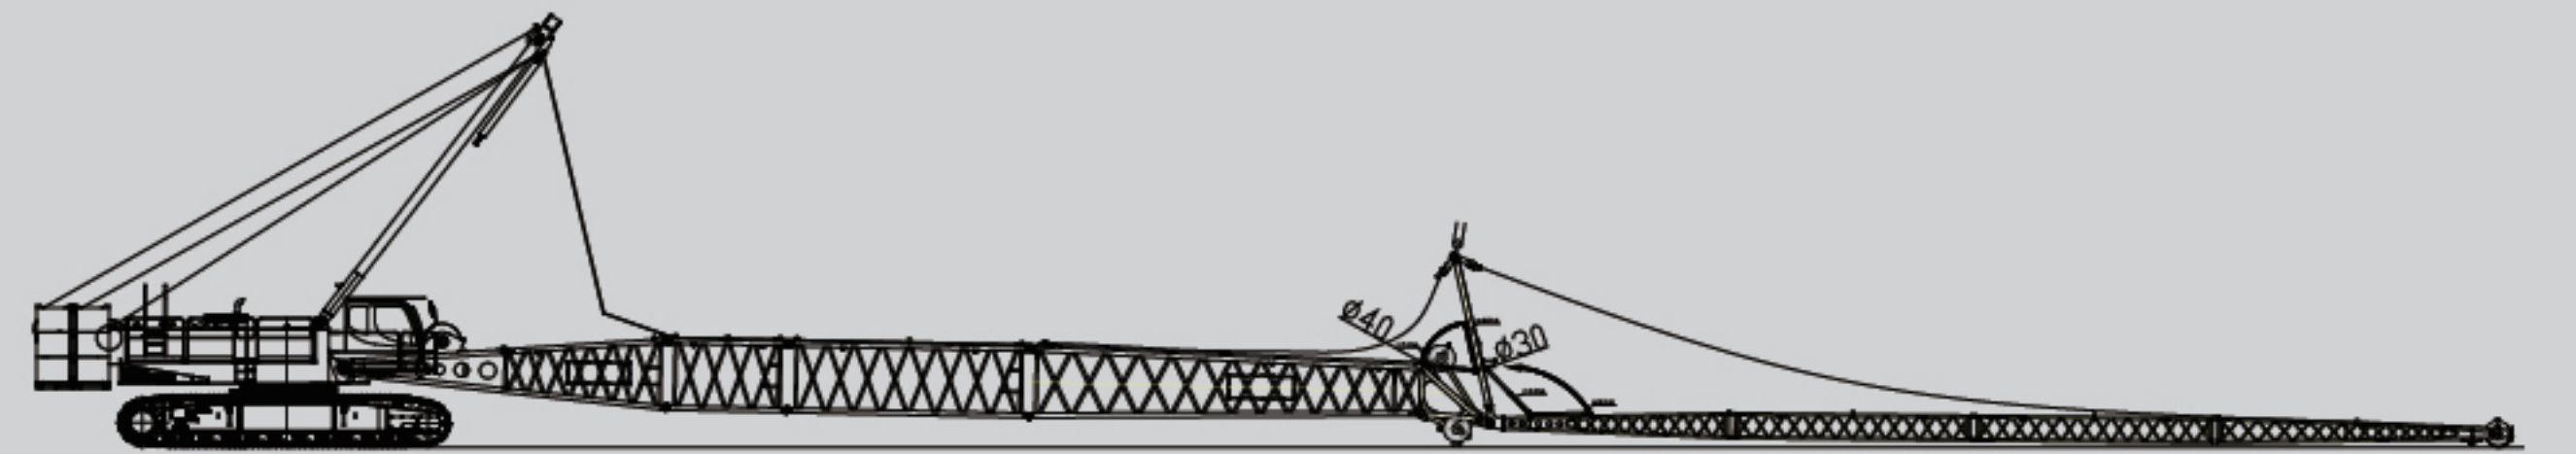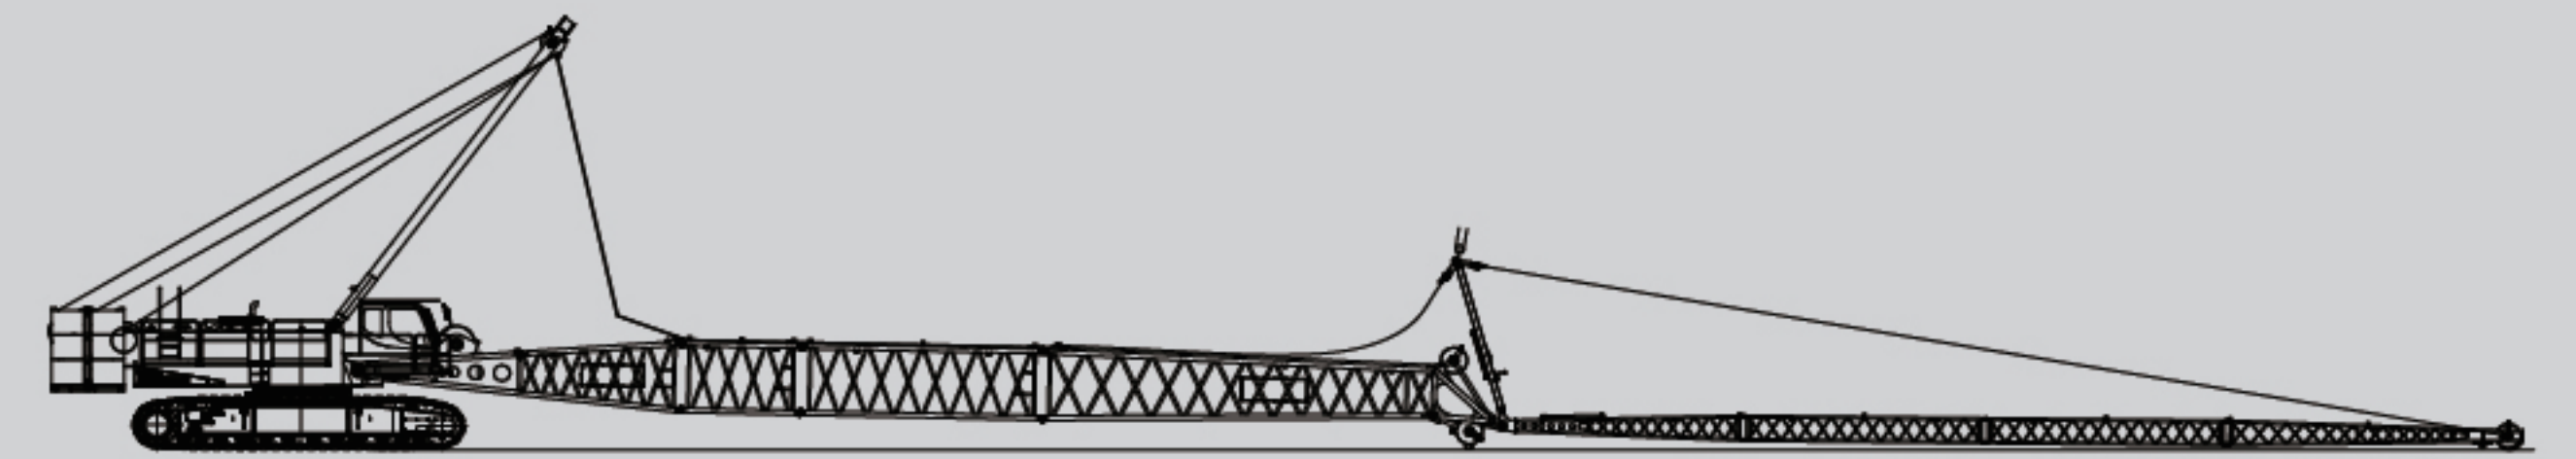




工况示意图  
Working Mode Illustration


11

**XGC130-I 履带起重机**  
XGC130-I CRAWLER CRANE

- P12-P13 工况示意图  
Working Mode Illustration
- P14-P14 主臂工况臂节组合  
Boom Combinations
- P15-P15 主臂作业范围图  
Boom Working Area
- P16-P17 主臂起重性能表  
Boom Lifting Load Chart
- P18-P18 臂端单滑轮起重性能表  
Boom Single Pulley Lifting Load Chart

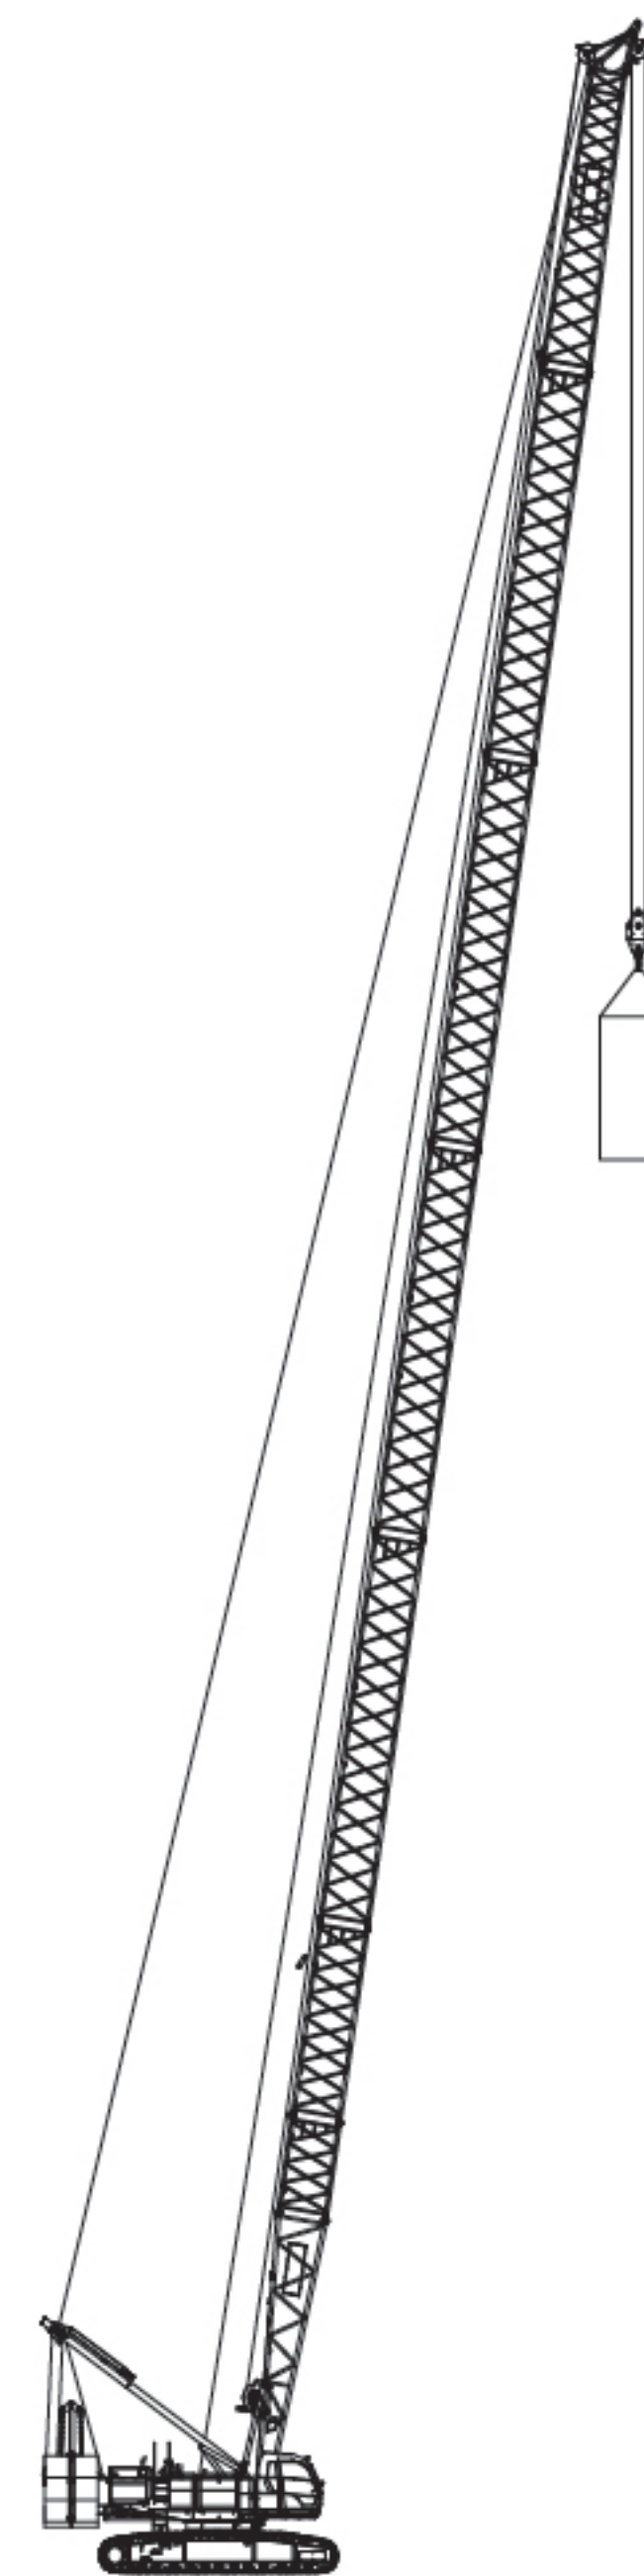


主臂工况  
Boom working mode

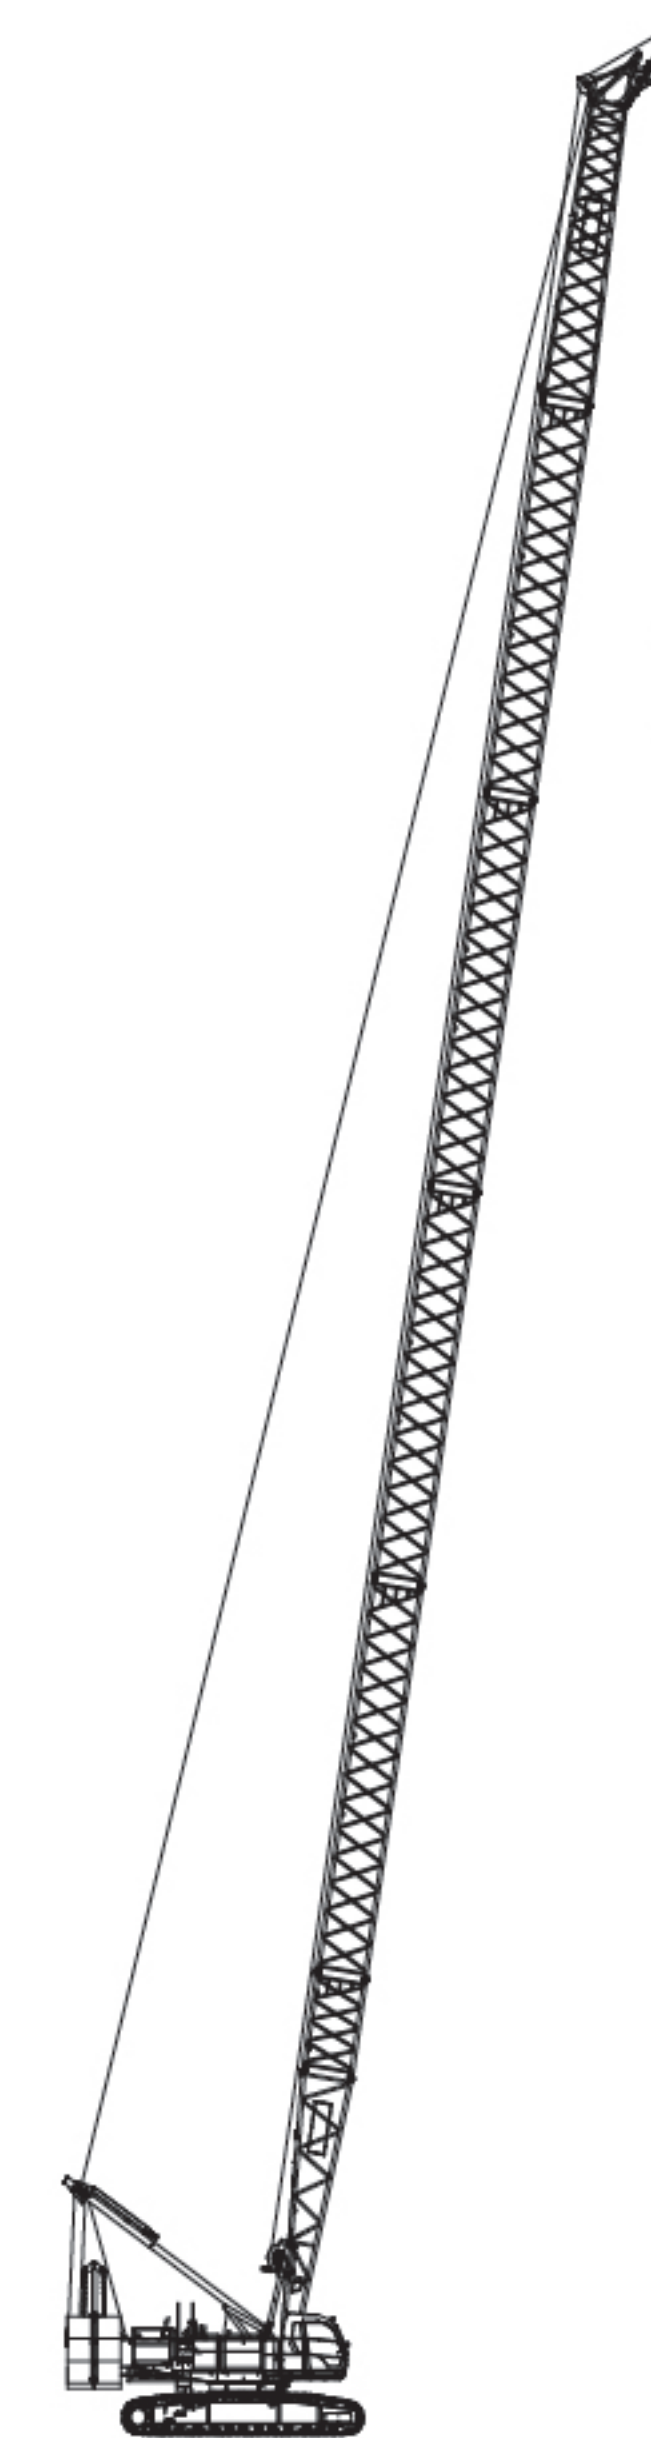

臂端单滑轮工况  
Boom single pulley mode



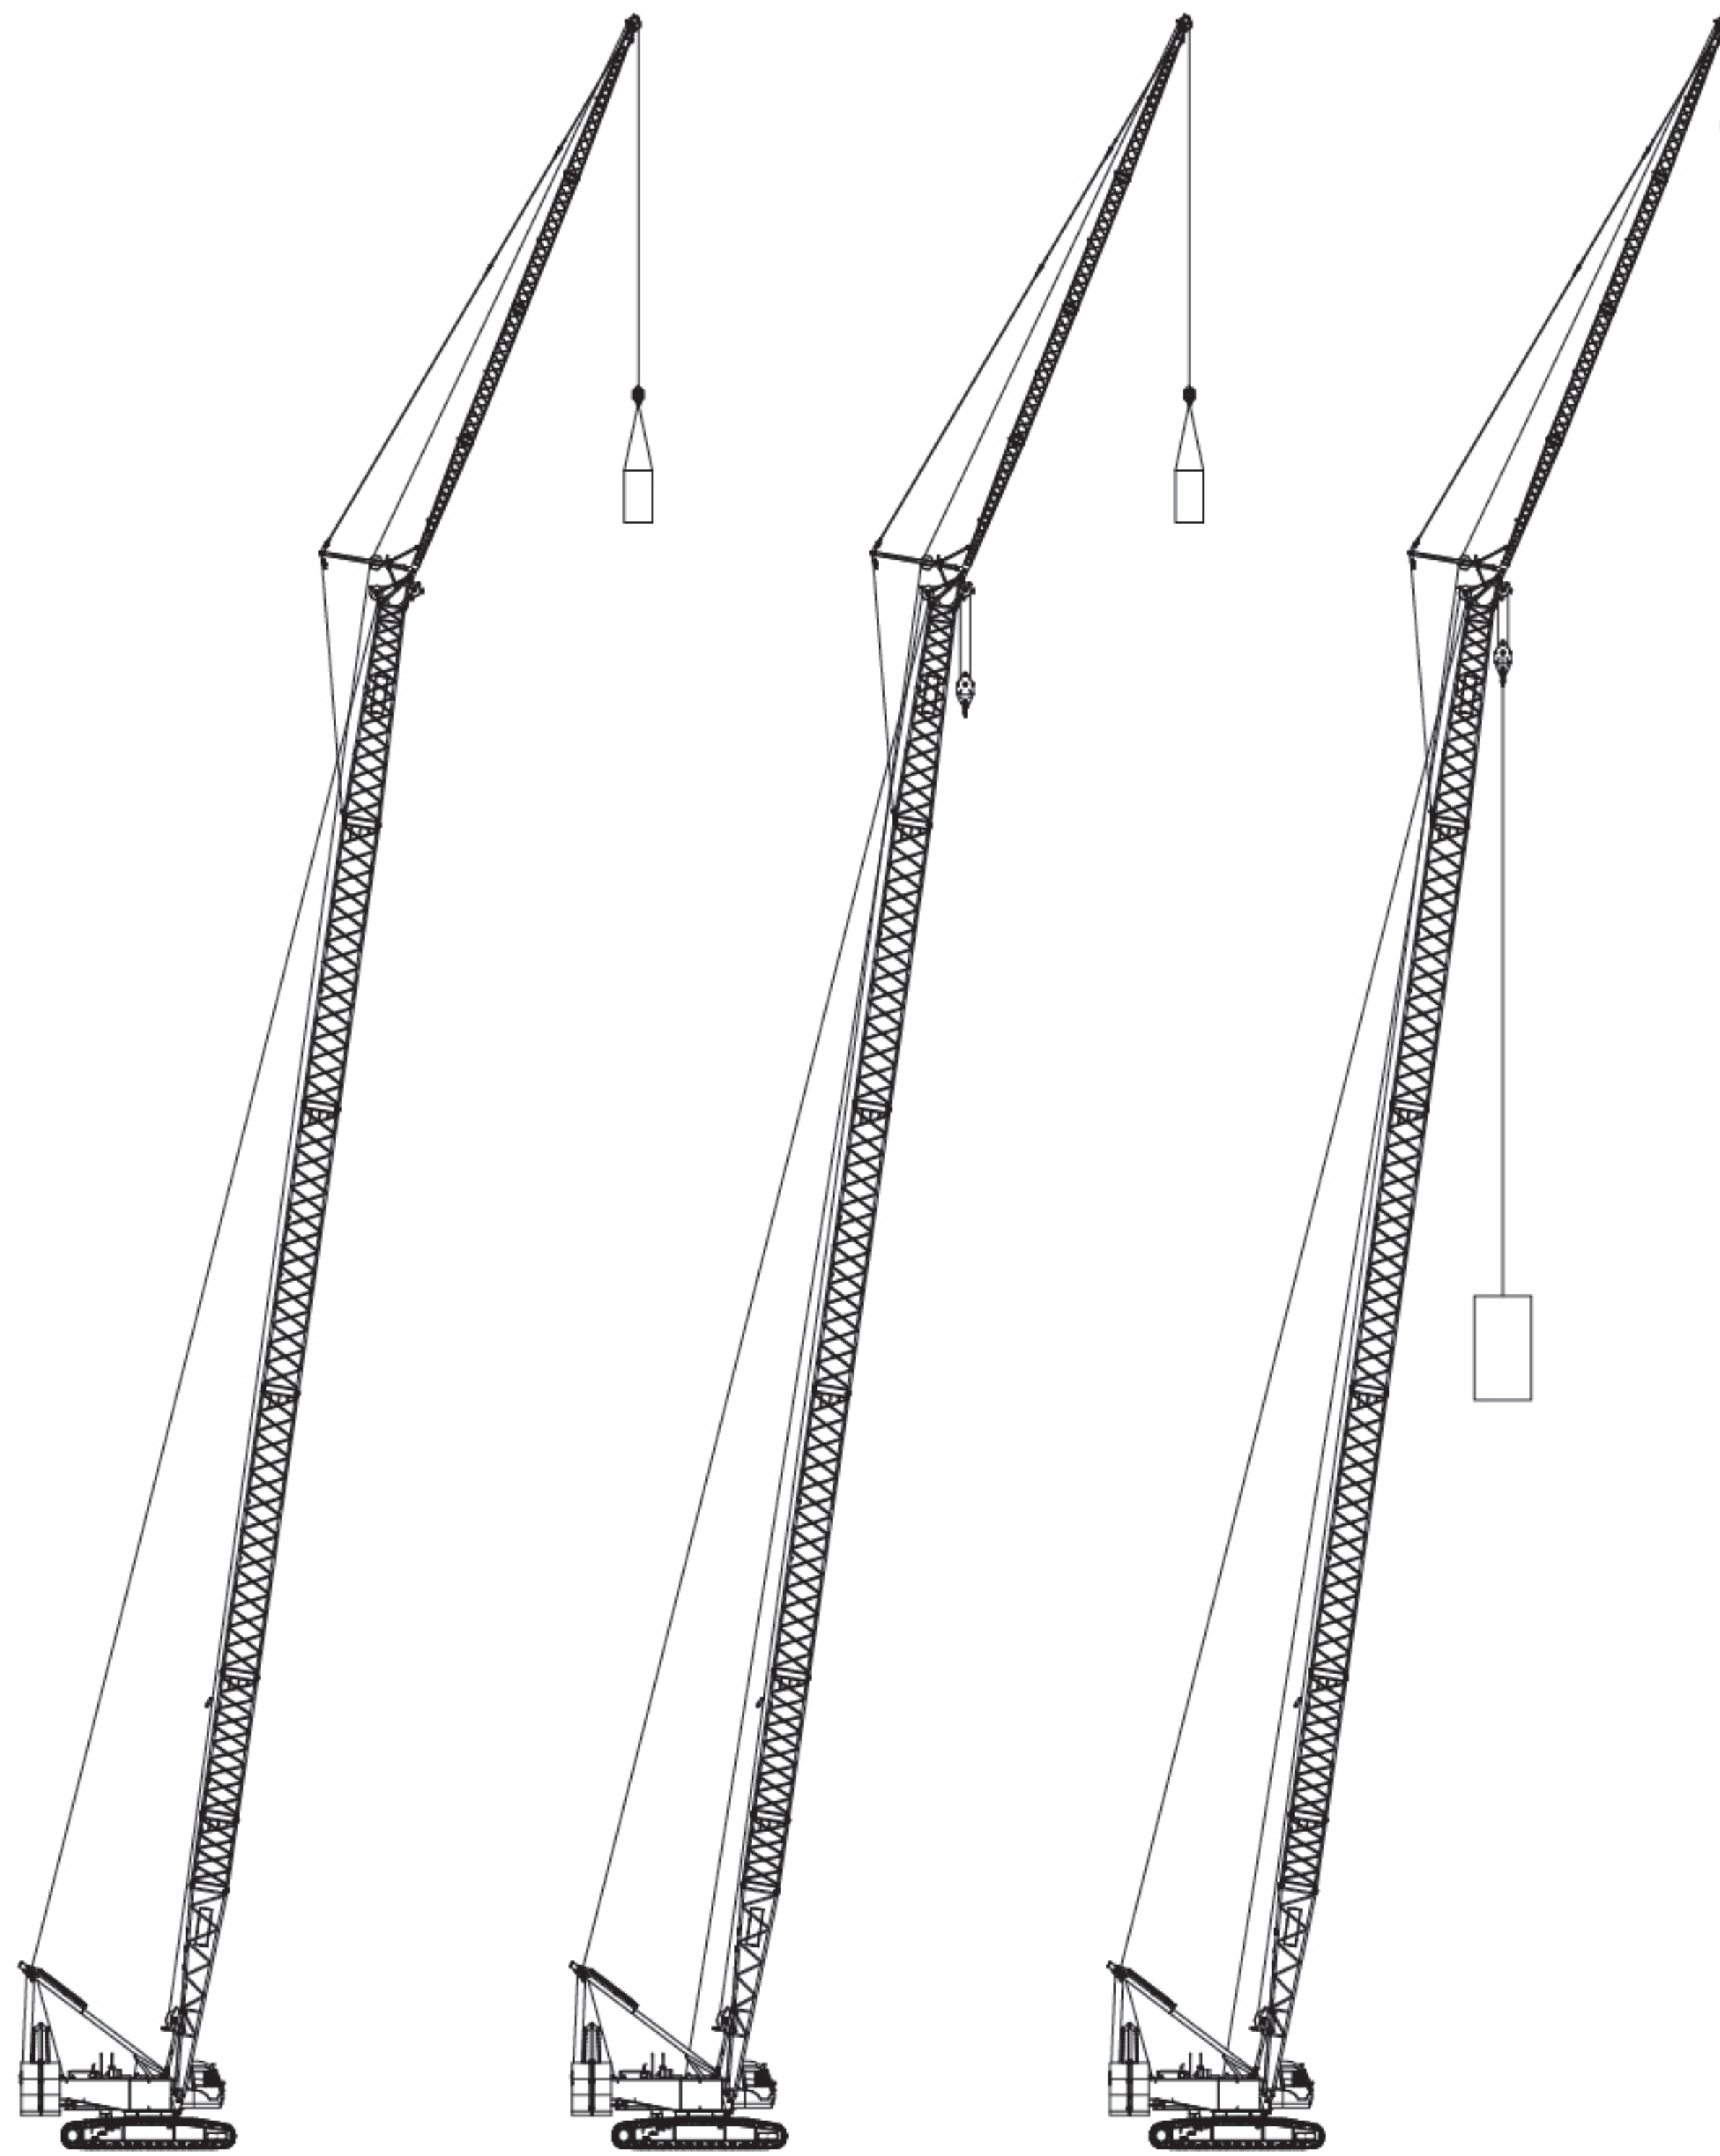


副臂工况  
Fixed jib mode

带主钩的副臂工况  
Fixed jib mode with hook block


带副臂的主臂工况  
Boom working mode with fixed jib

臂长 Boom length (m)	底节臂 Boom butt 9m	中间节臂 Boom insert			顶节臂 Boom top 10m
		3m	6m	12m	
19	1	0	0	0	1
22	1	1	0	0	1
25	1	0	1	0	1
28	1	1	1	0	1
31	1	0	0	1	1
34	1	1	0	1	1
37	1	0	1	1	1
40	1	1	1	1	1
43	1	0	0	2	1
46	1	1	0	2	1
49	1	0	1	2	1
52	1	1	1	2	1
55	1	0	0	3	1
58	1	1	0	3	1
61	1	0	1	3	1
64	1	1	1	3	1
67	1	0	0	4	1
70	1	1	0	4	1
73	1	0	1	4	1
76	1	1	1	4	1

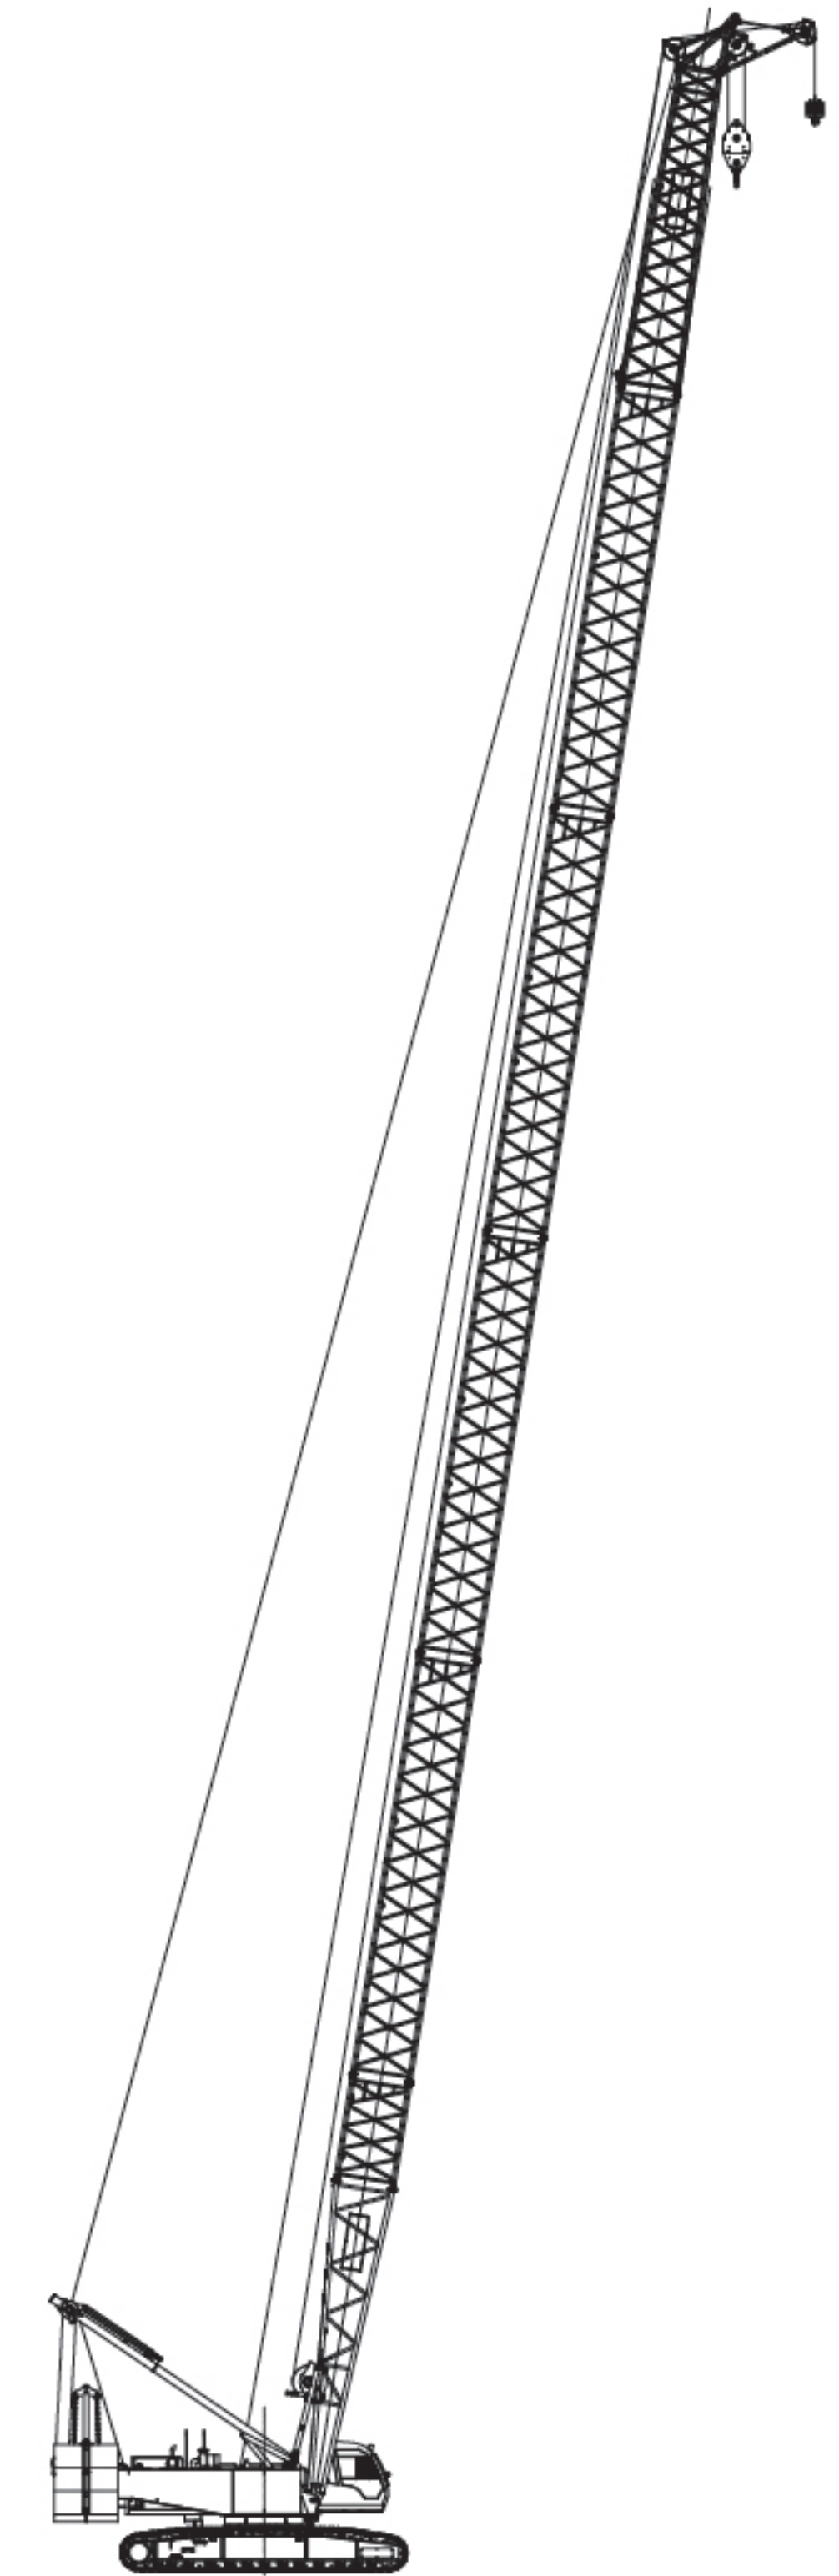



主臂作业范围图  
Boom Working Area

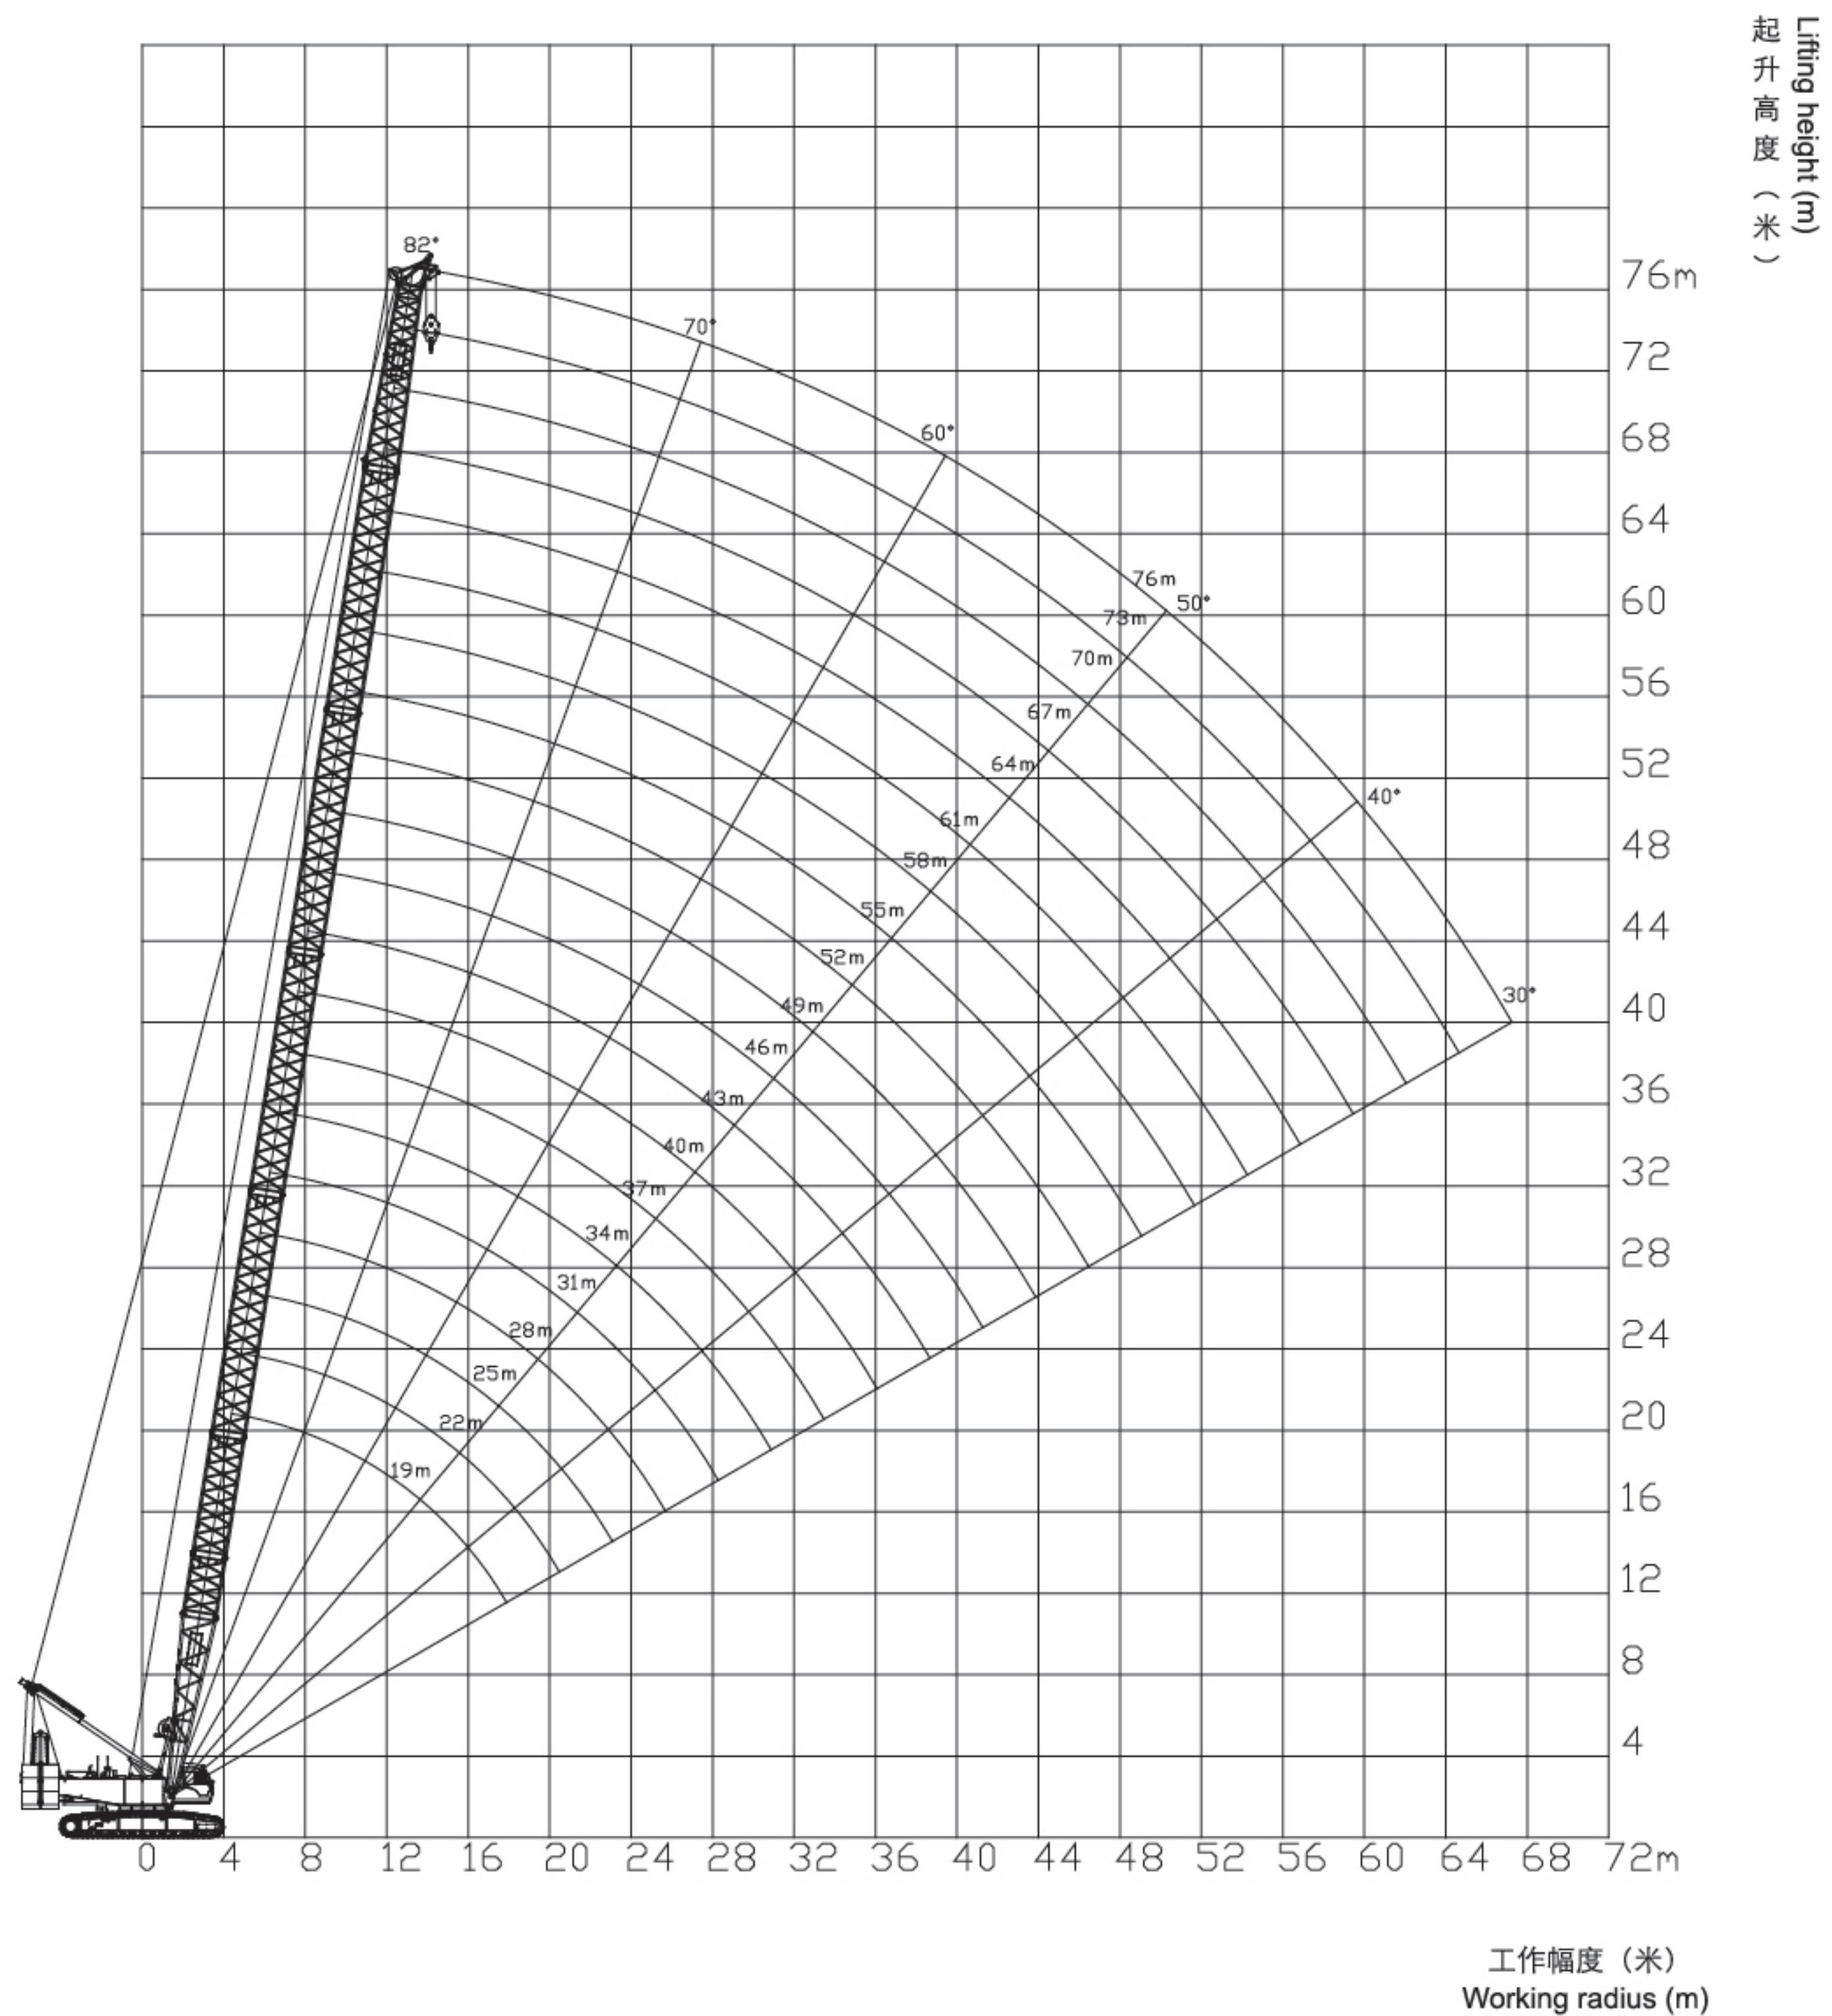

主臂起重性能表  
Boom Lifting Load Chart

幅度 Radius	臂长Boom length(m)										幅度 Radius	
	19	22	25	28	31	34	37	40	43	46		
5	130.0											5
6	117.0	109.3	102.5									6
7	100.3	100.1	97.4	88.0	85.2							7
8	84.5	84.6	84.6	84.5	79.2	74.9	66.1					8
9	70.0	70.0	70.0	70.0	70.0	69.9	65.4	58.5	51.9			9
10	59.6	59.6	59.6	59.5	59.5	59.4	59.4	57.9	51.4	50.8		10
12	45.7	45.7	45.7	45.6	45.6	45.5	45.4	45.3	45.3	45.1		12
14	36.8	36.8	36.8	36.7	36.7	36.6	36.5	36.4	36.3	36.2		14
16	30.7	30.7	30.7	30.6	30.6	30.4	30.4	30.2	30.2	30.0		16
18	26.1	26.1	26.1	26.0	26.0	25.9	25.8	25.7	25.6	25.5		18
20		22.7	22.7	22.6	22.6	22.5	22.4	22.2	22.2	22.0		20
22			19.9	19.8	19.9	19.7	19.6	19.5	19.4	19.3		22
24				17.6	17.6	17.5	17.4	17.3	17.2	17.1		24
26				15.8	15.8	15.7	15.6	15.4	15.4	15.2		26
28					14.3	14.1	14.0	13.9	13.9	13.7		28
30						12.8	12.7	12.6	12.5	12.4		30
32							11.6	11.4	11.4	11.2		32
34								10.4	10.4	10.2		34
36								9.6	9.5	9.4		36
38									8.8	8.6		38
40										7.9		40
配重 Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	配重 Counterweight



**主臂起重性能表**  
**Boom Lifting Load Chart**

幅度 Radius	臂长Boom length(m)										幅度 Radius
	49	52	55	58	61	64	67	70	73	76	
10	45.3	40.8									10
12	44.4	40.0	36.4	32.9	30.0	27.1					12
14	36.1	36.0	35.7	32.2	29.4	26.6	24.2	21.8	19.7	17.8	14
16	29.9	29.8	29.7	29.6	28.8	26.0	23.7	21.3	19.3	17.3	16
18	25.4	25.2	25.2	25.0	24.9	24.7	23.2	20.9	18.9	16.8	18
20	21.9	21.8	21.7	21.5	21.4	21.2	21.2	20.5	18.1	16.3	20
22	19.2	19.0	19.0	18.8	18.7	18.5	18.4	18.3	17.4	15.8	22
24	17.0	16.8	16.7	16.6	16.4	16.3	16.2	16.0	15.9	14.7	24
26	15.1	14.9	14.9	14.7	14.6	14.4	14.4	14.2	14.0	13.7	26
28	13.6	13.4	13.3	13.2	13.0	12.9	12.8	12.6	12.5	12.3	28
30	12.3	12.1	12.0	11.8	11.7	11.5	11.5	11.3	11.2	11.0	30
32	11.1	10.9	10.9	10.7	10.6	10.4	10.3	10.2	10.0	9.8	32
34	10.1	9.9	9.9	9.7	9.6	9.4	9.3	9.2	9.0	8.8	34
36	9.3	9.1	9.0	8.8	8.7	8.5	8.5	8.3	8.2	8.0	36
38	8.5	8.3	8.3	8.1	7.9	7.8	7.7	7.5	7.4	7.2	38
40	7.8	7.6	7.6	7.4	7.3	7.1	7.0	6.8	6.7	6.5	40
42	7.2	7.0	6.9	6.8	6.6	6.4	6.4	6.2	6.1	5.9	42
44	6.6	6.4	6.4	6.2	6.1	5.9	5.8	5.6	5.5	5.3	44
46		5.9	5.9	5.7	5.6	5.4	5.3	5.1	5.0	4.8	46
48			5.4	5.2	5.1	4.9	4.9	4.7	4.5	4.3	48
50				4.8	4.7	4.5	4.4	4.2	4.1	3.9	50
52					4.3	4.1	4.0	3.8	3.7	3.5	52
54					3.9	3.7	3.7	3.5	3.3	3.1	54
56						3.4	3.3	3.1	3.0	2.8	56
58							3.0	2.8	2.7	2.5	58
60								2.5	2.4	2.2	60
62								2.3	2.1	1.9	62
配重 Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	配重 Counterweight

**臂端单滑轮起重性能表**  
**Boom Single Pulley Lifting Load Chart**

幅度 Radius	臂长Boom length (m)																		幅度 Radius
	19	22	25	28	31	34	37	40	43	46	49	52	55	58	61	64	67	70	
7	13.0																		7
8	13.0	13.0	13.0																8
9	13.0	13.0	13.0	13.0	13.0														9
10	13.0	13.0	13.0	13.0	13.0	13.0	13.0												10
12	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0										12
14	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0								14
16	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0					16
18	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	18
20		13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	20
22			13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	22
24				13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	24
26					13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	26
28						13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	12.9	12.7	12.6	12.5	28
30							12.5	12.4	12.3	12.2	12.1	12.0	11.8	11.7	11.5	11.4	11.2	11.0	30
32								11.3	11.1	11.1	10.9	10.8	10.6	10.6	10.4	10.3	10.1	9.9	32
34											10.1	10.1	9.9	9.8	9.6	9.6	9.4	9.3	34
36												9.3	9.2	9.1	9.0	8.8	8.7	8.5	36
38													8.5	8.3	8.2	8.0	8.0	7.8	38
40														7.6	7.5	7.3	7.3	7.1	40
42															6.9	6.7	6.6	6.5	42
44																6.3	6.1	6.1	44
46																	5.6	5.6	46
48																		5.1	48
50																			50
52																			52
54																			54
56																			56
58																			58
60																			60
62																			62
配重 Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	45+6	配重 Counterweight




# 19

## XGC130-I 履带起重机 XGC130- I CRAWLER CRANE

- P20-P20 固定副臂臂节组合  
Fixed Jib Combinations
- P21-P21 固定副臂作业范围图  
Fixed Jib Working Area
- P22-P33 固定副臂起重性能表  
Fixed Jib Lifting Load Chart
- P34-P37 主要零部件  
Main parts
- P38-P38 工作条件及注意  
Working conditions and Cautions


### 固定副臂臂节组合 Fixed Jib Combinations

副臂长度 Jib length (m)	6m底节臂 Jib base	6m中间节 Jib insert	7m顶节臂 Jib top
13	1	-	1
19	1	1	1
25	1	2	1

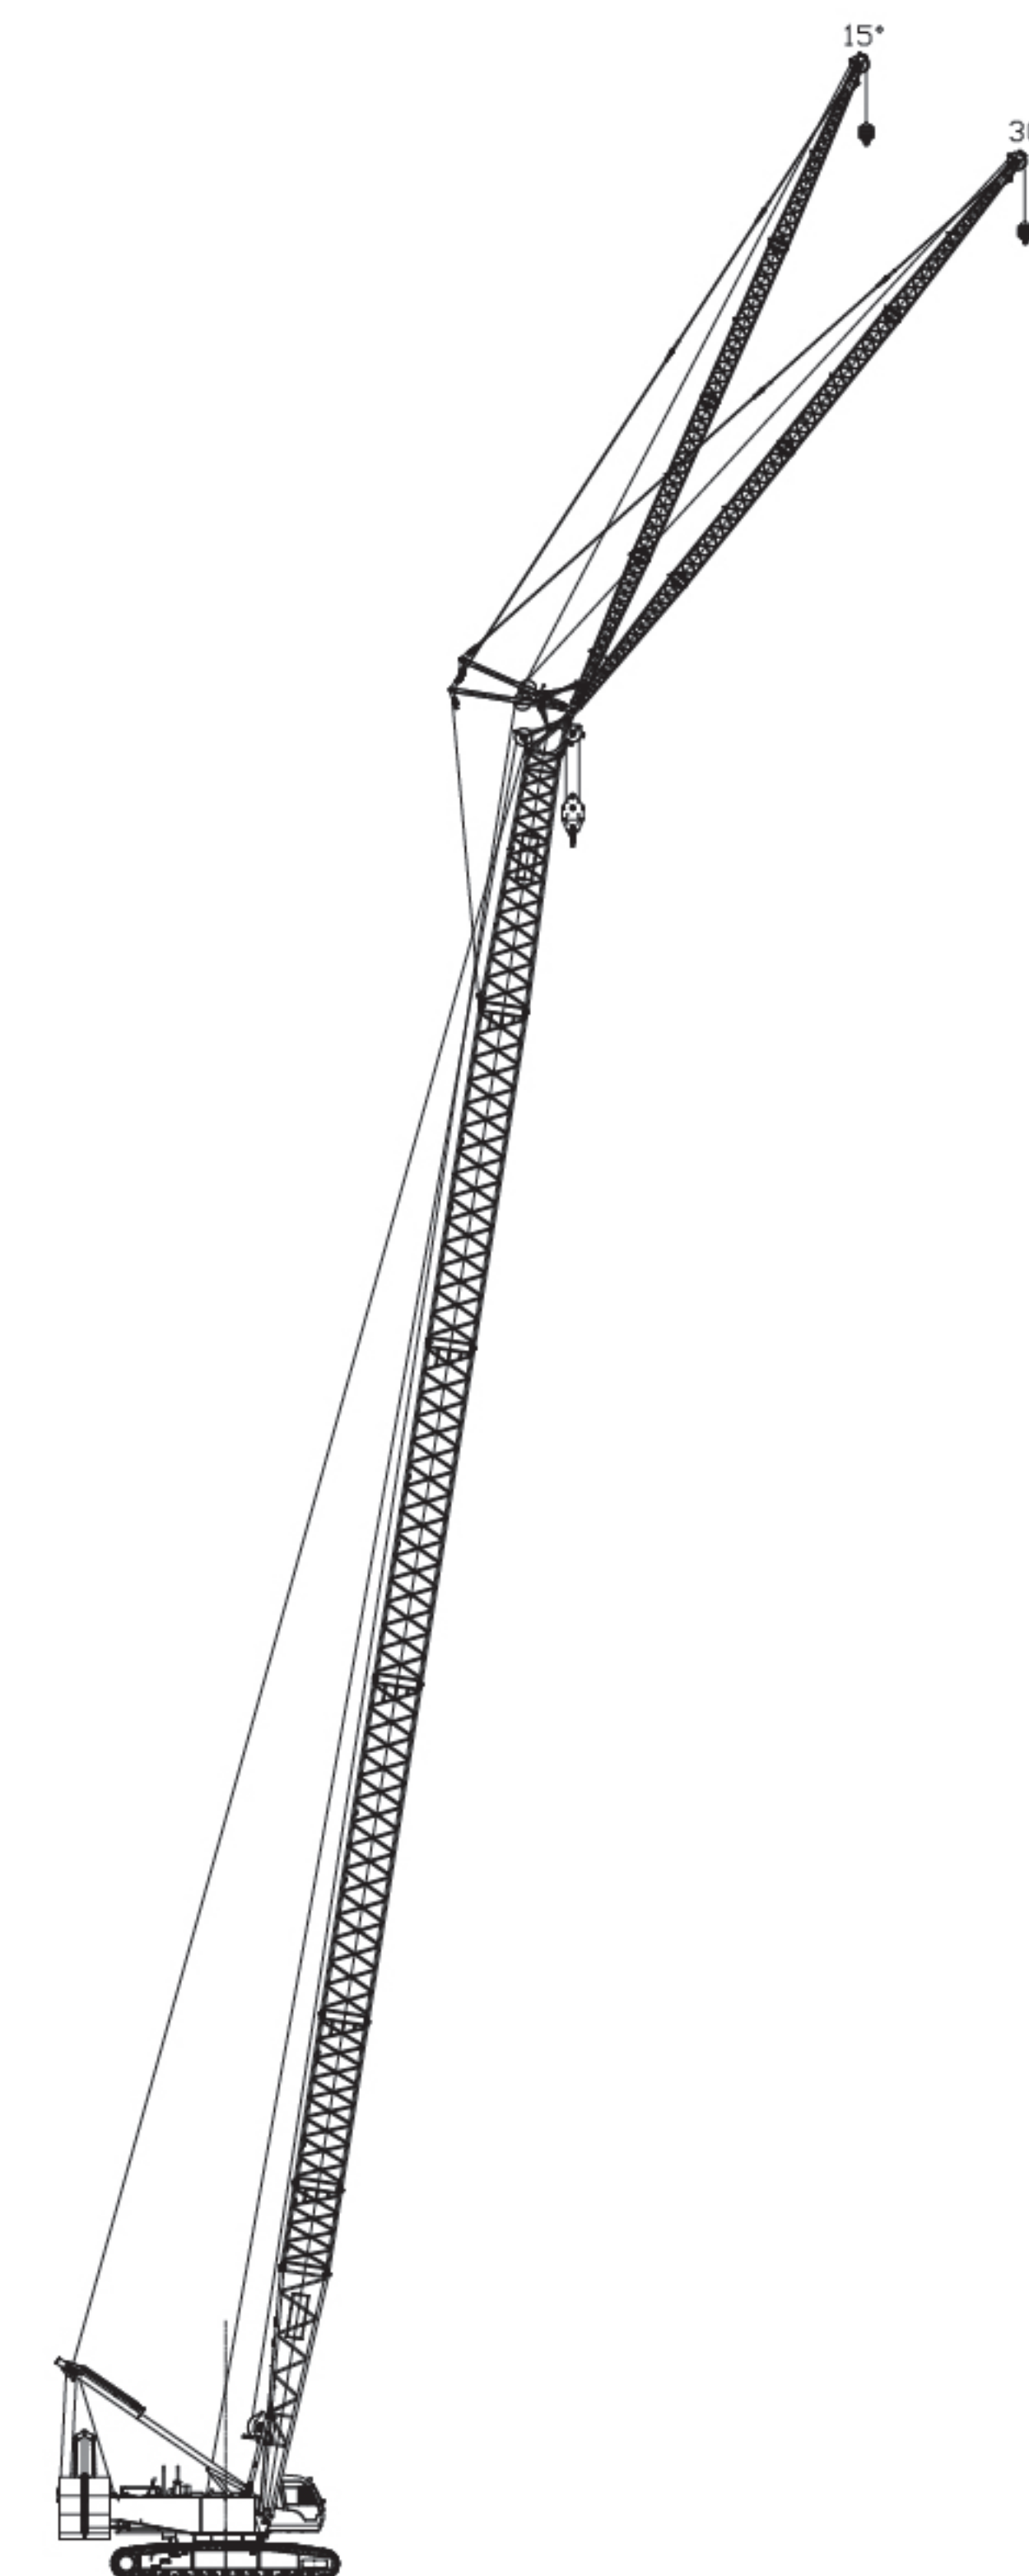



固定副臂作业范围图  
Fixed Jib Working Area

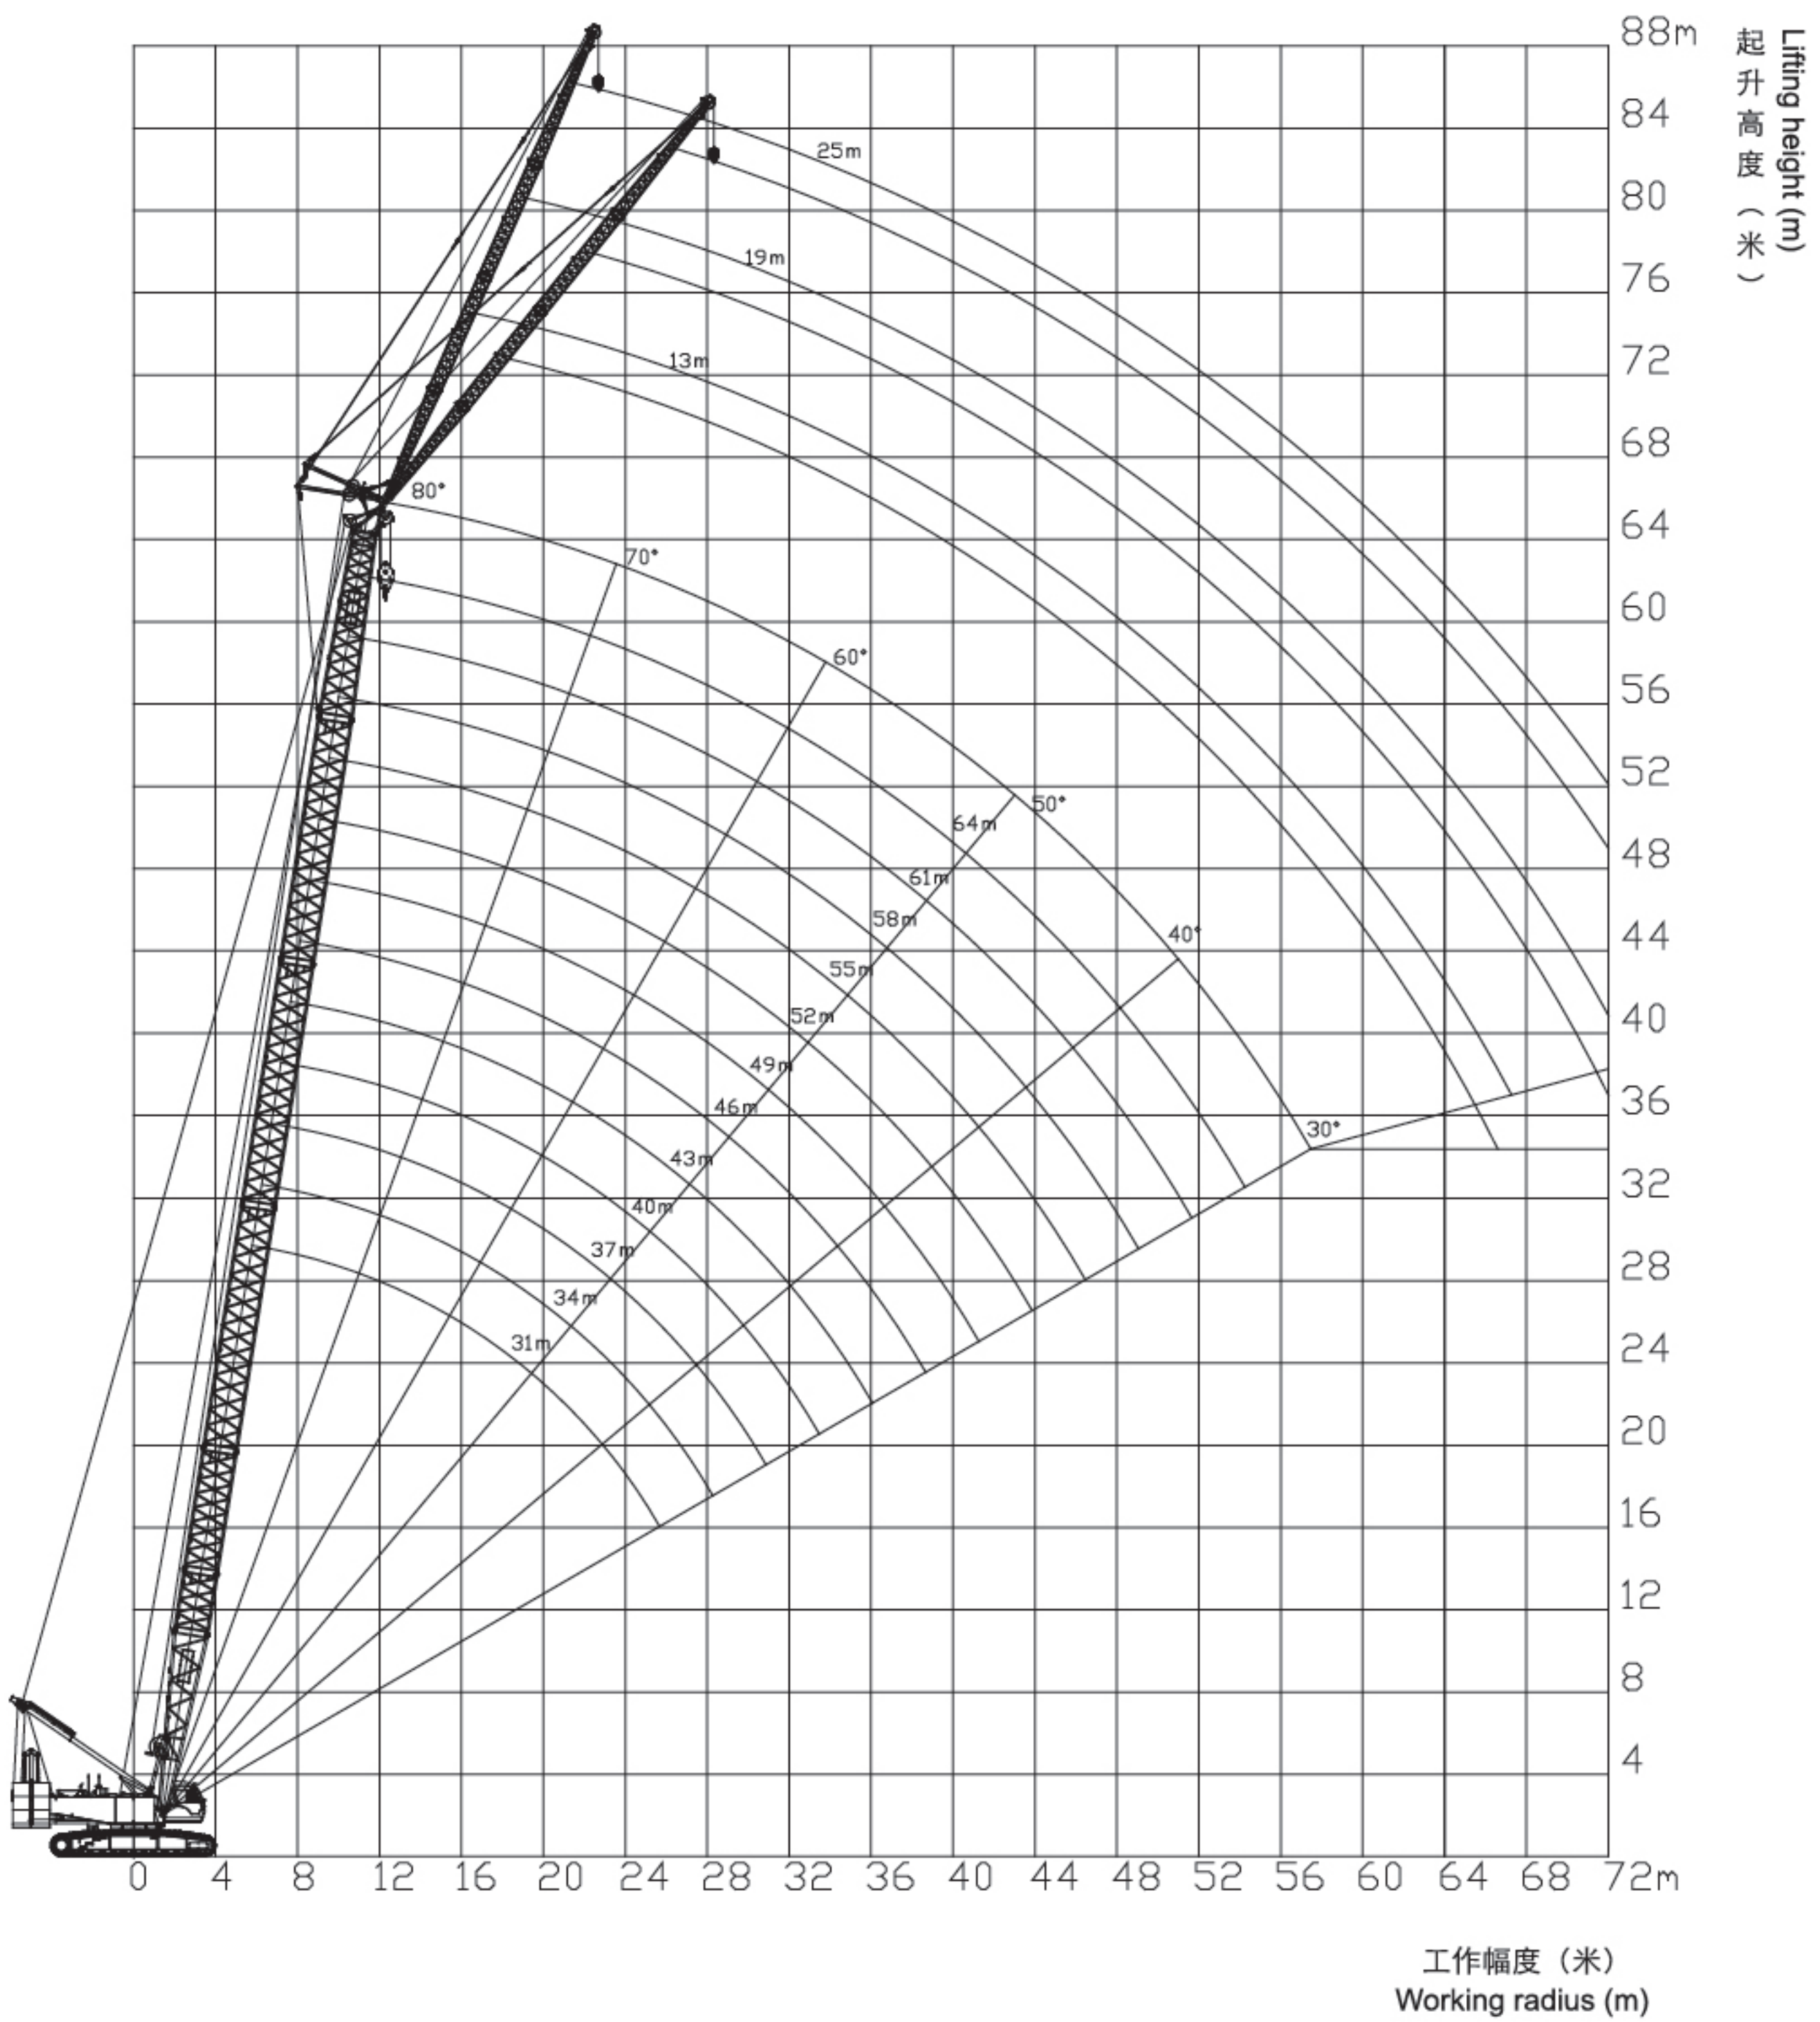

固定副臂起重性能表  
Fixed Jib Lifting Load Chart

主臂长 Boom length(m)	31						主臂长 Boom length(m)
副臂长 Jib length(m)	13		19		25		副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
12	17.8						12
14	17.3	15	9.5				14
16	16.7	14.1	9.3				16
18	16.1	13.4	9.1	8	5.7		18
20	15.6	12.7	8.8	7.9	5.6		20
22	15	12.1	8.5	7.7	5.3		22
24	14.1	11.6	8.2	7.6	5.2	4.7	24
26	13.3	11.1	8.2	7.4	5.1	4.6	26
28	12.5	10.7	8	7.3	4.9	4.4	28
30	11.9	10.4	7.8	7.2	4.8	4.3	30
32	11.4	10	7.7	7	4.6	4.2	32
34	10.9	9.8	7.5	7	4.5	4.1	34
36	10.4	9.5	7.4	7	4.4	4.1	36
38	10	9.3	7.3	6.9	4.3	4	38
40			7.3	6.7	4.3	3.9	40
42			7.1	6.6	4.2	3.9	42
44			6.9	6.4	4.1	3.9	44
46					4.1	3.8	46
48					4.1	3.8	48
50					4	3.9	50
52					4	3.9	52
配重 Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重 Counterweight



**固定副臂起重性能表**  
**Fixed Jib Lifting Load Chart**

主臂长 Boom length(m)	34						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
12	18						12
14	17.3		9.7				14
16	17	14.4	9.4		5.8		16
18	16.5	13.6	9.1	8.1	5.5		18
20	16	13	8.8	7.9	5.4		20
22	15.6	12.4	8.7	7.7	5.2	4.7	22
24	14.6	11.9	8.4	7.6	5.1	4.5	24
26	13.8	11.4	8.2	7.5	5	4.4	26
28	13.1	11	8	7.4	4.9	4.4	28
30	12.4	10.6	7.9	7.2	4.8	4.2	30
32	11.9	10.3	7.7	7.1	4.7	4.2	32
34	11.3	10	7.6	7.1	4.5	4.1	34
36	10.8	9.8	7.5	7	4.5	4	36
38	10	9.5	7.4	6.9	4.3	4	38
40	9.2	9.3	7.3	6.8	4.2	4	40
42	8.6	8.6	7.2	6.7	4.2	3.9	42
44			7.1	6.6	4.1	3.9	44
46			6.9	6.4	4.1	3.8	46
48					4.1	3.8	48
50					4	3.9	50
52					4	3.8	52
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight

主臂长 Boom length(m)	37						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
12	18.2						12
14	17.6						14
16	17	14.6	9.4				16
18	16.5	13.9	9.3		5.6		18
20	16.1	13.2	8.9	8	5.4		20
22	15.7	12.6	8.7	7.8	5.3		22
24	15.2	12.1	8.5	7.6	5.2	4.6	24
26	14.3	11.7	8.3	7.6	5	4.5	26
28	13.6	11.3	8.1	7.4	4.9	4.4	28
30	12.9	10.9	7.9	7.3	4.8	4.3	30
32	12.3	10.5	7.8	7.2	4.7	4.2	32
34	11.6	10.2	7.7	7.1	4.6	4.1	34
36	10.6	10	7.6	7.1	4.5	4.1	36
38	9.8	9.7	7.5	6.9	4.4	4	38
40	9.1	9.2	7.4	6.9	4.4	4	40
42	8.4	8.5	7.3	6.9	4.2	3.9	42
44	7.9	7.9	7.2	6.7	4.2	3.9	44
46			7.1	6.6	4.1	3.9	46
48			7	6.5	4.1	3.8	48
50			6.6	6.4	4.1	3.8	50
52					4	3.9	52
54					4	3.8	54
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight



**固定副臂起重性能表**  
**Fixed Jib Lifting Load Chart**

主臂长 Boom length(m)	40						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
14	17.8						14
16	17.2	14.8	9.5				16
18	16.8	14.1	9.2		5.6		18
20	16.4	13.4	9	7.9	5.5		20
22	16	12.9	8.9	7.8	5.3		22
24	15.6	12.4	8.6	7.7	5.2	4.6	24
26	14.8	11.9	8.4	7.5	5.1	4.5	26
28	14.1	11.5	8.3	7.4	5	4.4	28
30	13.4	11.1	8.1	7.4	4.9	4.3	30
32	12.4	10.8	8	7.2	4.8	4.2	32
34	11.4	10.5	7.8	7.2	4.6	4.2	34
36	10.5	10.2	7.6	7	4.5	4.1	36
38	9.6	9.8	7.5	7	4.5	4	38
40	8.9	9	7.4	6.9	4.4	4	40
42	8.3	8.4	7.4	6.9	4.3	3.9	42
44	7.7	7.7	7.3	6.8	4.2	3.9	44
46	7.1	7.2	7.2	6.7	4.2	3.8	46
48			6.9	6.6	4.1	3.9	48
50			6.4	6.5	4.1	3.8	50
52			6	6.1	4	3.8	52
54					4	3.9	54
56					4	3.8	56
58					4	3.9	58
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight

主臂长 Boom length(m)	43						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
14	17.7						14
16	17.2	14.9	9.5				16
18	16.8	14.2	9.3		5.7		18
20	16.6	13.6	9.1	8	5.5		20
22	16	13.1	8.8	7.9	5.4		22
24	15.7	12.6	8.6	7.7	5.3	4.6	24
26	15.3	12.1	8.5	7.6	5.1	4.5	26
28	14.5	11.7	8.3	7.5	5	4.4	28
30	13.5	11.3	8.1	7.3	4.9	4.4	30
32	12.3	11	8	7.3	4.8	4.2	32
34	11.3	10.7	7.9	7.1	4.7	4.2	34
36	10.4	10.4	7.8	7.1	4.6	4.1	36
38	9.6	9.7	7.7	7	4.6	4.1	38
40	8.8	9	7.5	7	4.4	4	40
42	8.2	8.3	7.4	7	4.4	4	42
44	7.6	7.7	7.4	6.9	4.3	3.9	44
46	7	7.1	7.3	6.8	4.3	3.9	46
48	6.6	6.6	6.8	6.7	4.2	3.8	48
50	6.1	6.1	6.3	6.4	4.1	3.9	50
52			5.9	6	4.1	3.8	52
54			5.5	5.6	4	3.8	54
56					4	3.9	56
58					4	3.8	58
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight



**固定副臂起重性能表**  
**Fixed Jib Lifting Load Chart**

主臂长 Boom length(m)	46						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
14	17.9						14
16	17.5	15.1	9.6				16
18	17	14.4	9.3		5.7		18
20	16.6	13.8	9.2	8.1	5.6		20
22	16.3	13.3	9	8	5.4		22
24	16	12.8	8.8	7.7	5.4	4.7	24
26	15.7	12.3	8.6	7.7	5.2	4.5	26
28	14.8	11.9	8.4	7.5	5.1	4.5	28
30	13.4	11.6	8.3	7.4	5	4.4	30
32	12.2	11.2	8.2	7.4	4.9	4.3	32
34	11.1	10.9	7.9	7.2	4.7	4.3	34
36	10.2	10.4	7.8	7.2	4.7	4.2	36
38	9.4	9.6	7.7	7.1	4.6	4.1	38
40	8.6	8.8	7.6	7.1	4.5	4	40
42	8	8.1	7.5	7	4.5	4	42
44	7.4	7.5	7.4	7	4.3	4	44
46	6.9	7	7.1	6.9	4.3	4	46
48	6.4	6.4	6.6	6.8	4.3	3.9	48
50	5.9	6	6.1	6.3	4.2	3.8	50
52	5.5	5.5	5.7	5.8	4.1	3.9	52
54			5.3	5.4	4.1	3.8	54
56			5	5.1	4	3.8	56
58			4.6	4.7	4	3.9	58
60					4	3.8	60
62					4	3.9	62
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight

主臂长 Boom length(m)	49						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
14	18.1						14
16	17.7		9.7				16
18	17.2	14.6	9.4				18
20	16.9	14	9.2		5.6		20
22	16.5	13.5	9	8	5.5		22
24	16.2	13	8.8	7.8	5.3	4.7	24
26	15.7	12.5	8.6	7.7	5.2	4.6	26
28	14.6	12.1	8.5	7.6	5.1	4.5	28
30	13.2	11.8	8.3	7.5	5	4.4	30
32	12	11.4	8.2	7.3	4.9	4.3	32
34	11	11.1	8.1	7.3	4.8	4.2	34
36	10.1	10.3	8	7.2	4.7	4.2	36
38	9.2	9.4	7.8	7.2	4.7	4.1	38
40	8.5	8.7	7.7	7	4.5	4.1	40
42	7.8	8	7.6	7	4.5	4	42
44	7.3	7.4	7.5	6.9	4.4	4	44
46	6.7	6.8	6.9	7	4.3	3.9	46
48	6.2	6.3	6.4	6.6	4.3	3.9	48
50	5.8	5.8	6	6.2	4.2	3.9	50
52	5.4	5.4	5.6	5.7	4.1	3.9	52
54	5	5	5.2	5.3	4.1	3.9	54
56			4.8	4.9	4.1	3.9	56
58			4.5	4.6	4	3.8	58
60			4.2	4.2	4	3.9	60
62					4	3.8	62
64					3.8	3.9	64
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight



**固定副臂起重性能表**  
**Fixed Jib Lifting Load Chart**

主臂长 Boom length(m)	52						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
14	18						14
16	17.6						16
18	17.2	14.7	9.5				18
20	16.8	14.2	9.3		5.7		20
22	16.5	13.6	9.1	7.9	5.5		22
24	16.2	13.2	8.9	7.9	5.4		24
26	15.9	12.7	8.7	7.7	5.3	4.6	26
28	14.5	12.3	8.6	7.6	5.2	4.6	28
30	13.1	12	8.4	7.6	5.1	4.4	30
32	11.8	11.6	8.3	7.4	5	4.4	32
34	10.8	11.1	8.1	7.4	4.9	4.3	34
36	9.9	10.1	8	7.3	4.7	4.3	36
38	9	9.3	7.9	7.1	4.7	4.2	38
40	8.3	8.5	7.8	7.1	4.6	4.2	40
42	7.6	7.8	7.6	7	4.6	4.1	42
44	7	7.2	7.3	7	4.4	4	44
46	6.5	6.6	6.8	6.9	4.4	4	46
48	6	6.1	6.3	6.5	4.4	3.9	48
50	5.6	5.7	5.8	6	4.3	3.9	50
52	5.1	5.2	5.4	5.6	4.2	3.9	52
54	4.8	4.8	5	5.1	4.1	3.9	54
56	4.4	4.4	4.6	4.8	4.1	3.8	56
58	4.1	4.1	4.3	4.4	4.1	3.9	58
60			4	4.1	4	3.8	60
62			3.7	3.8	3.9	3.8	62
64					3.5	3.5	64
66					3.3	3.3	66
68					3.1	3.1	68
70					2.8	2.8	70
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight

主臂长 Boom length(m)	55						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
16	17.7						16
18	17.4	14.9	9.5				18
20	17	14.3	9.4		5.7		20
22	16.7	13.8	9.2	8	5.5		22
24	16.4	13.3	9	7.9	5.5		24
26	16	12.9	8.9	7.7	5.4	4.6	26
28	14.4	12.5	8.7	7.7	5.2	4.5	28
30	13	12.1	8.4	7.5	5.1	4.5	30
32	11.8	11.8	8.3	7.5	5	4.4	32
34	10.7	11	8.2	7.3	4.9	4.3	34
36	9.8	10	8.1	7.3	4.8	4.2	36
38	9	9.2	7.9	7.2	4.8	4.2	38
40	8.2	8.4	7.8	7.2	4.6	4.1	40
42	7.6	7.8	7.8	7.1	4.6	4.1	42
44	7	7.1	7.2	7.1	4.5	4	44
46	6.4	6.6	6.7	6.9	4.4	4	46
48	5.9	6.1	6.2	6.4	4.4	4	48
50	5.5	5.6	5.7	5.9	4.3	3.9	50
52	5.1	5.2	5.3	5.5	4.2	3.9	52
54	4.7	4.8	4.9	5.1	3.9	3.9	54
56	4.3	4.4	4.5	4.7	3.7	3.7	56
58	4	4	4.2	4.3	3.4	3.4	58
60	3.7	3.7	3.9	4	3.2	3.2	60
62			3.6	3.7	3	3	62
64			3.3	3.4	2.6	2.6	64
66					2.4	2.4	66
68					2.3	2.3	68
70					2.1	2.1	70
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight



**固定副臂起重性能表**  
**Fixed Jib Lifting Load Chart**

主臂长 Boom length(m)	58						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
16	17.9						16
18	17.5	15	9.6				18
20	17.2	14.4	9.4		5.7		20
22	16.9	13.9	9.1	8	5.6		22
24	16.4	13.5	9	8	5.4		24
26	15.9	13.1	8.8	7.8	5.3	4.7	26
28	14.2	12.7	8.7	7.7	5.2	4.5	28
30	12.8	12.3	8.6	7.6	5.1	4.5	30
32	11.6	11.9	8.4	7.6	5.1	4.4	32
34	10.5	10.8	8.3	7.4	5	4.4	34
36	9.6	9.9	8.1	7.4	4.9	4.3	36
38	8.8	9	8	7.3	4.8	4.3	38
40	8	8.3	8	7.1	4.7	4.2	40
42	7.4	7.6	7.7	7.2	4.7	4.2	42
44	6.8	7	7	7	4.4	4.1	44
46	6.2	6.4	6.5	6.8	4	4	46
48	5.7	5.9	6	6.3	3.7	3.7	48
50	5.3	5.4	5.5	5.8	3.4	3.4	50
52	4.9	5	5.1	5.3	3.2	3.2	52
54	4.5	4.6	4.7	4.9	2.9	2.9	54
56	4.1	4.2	4.4	4.5	2.7	2.7	56
58	3.8	3.9	4	4.2	2.5	2.5	58
60	3.4	3.5	3.7	3.8	2.3	2.3	60
62	3.1	3.2	3.4	3.5	2.1	2.1	62
64			3.1	3.2	1.8	1.8	64
66			2.8	2.9			66
68			2.5	2.6			68
70			2.3	2.3			70
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight


主臂长 Boom length(m)	61						主臂长 Boom length(m)
	13		19		25		
副臂长 Jib length(m)							副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)							工作幅度 Working radius(m)
16	18						16
18	17.7	15.1	9.7				18
20	17.4	14.6	9.4		5.8		20
22	16.8	14.1	9.3	8.1	5.6		22
24	16.6	13.6	9.1	7.9	5.5		24
26	15.7	13.2	8.9	7.8	5.4	4.7	26
28	14.1	12.8	8.8	7.7	5.3	4.6	28
30	12.7	12.5	8.7	7.6	5.2	4.5	30
32	11.5	11.8	8.4	7.5	5.1	4.4	32
34	10.4	10.7	8	7.5	5	4.4	34
36	9.5	9.8	7.5	7.3	4.5	4.3	36
38	8.6	8.9	7	7	4	4	38
40	7.9	8.1	6.5	6.5	3.6	3.6	40
42	7.2	7.5	6	6	3.3	3.3	42
44	6.6	6.8	5.6	5.6	3	3	44
46	6.1	6.3	5.2	5.2	2.7	2.7	46
48	5.6	5.8	4.9	4.9	2.4	2.4	48
50	5.1	5.3	4.5	4.5	2.2	2.2	50
52	4.7	4.9	4.2	4.2	2	2	52
54	4.3	4.5	3.9	3.9			54
56	4	4.1	3.7	3.7			56
58	3.6	3.7	3.4	3.4			58
60	3.3	3.3	3.2	3.2			60
62	3	3	3	3			62
64	2.7	2.7	2.6	2.6			64
66			2.4	2.4			66
68			2.3	2.3			68
70			2.1	2.1			70
配重Counterweight	45+6	45+6	45+6	45+6	45+6	45+6	配重Counterweight




**固定副臂起重性能表**  
**Fixed Jib Lifting Load Chart**

主臂长 Boom length(m)	64				主臂长 Boom length(m)
副臂长 Jib length(m)	13		19		副臂长 Jib length(m)
副臂安装角度 Jib angle(°)	15	30	15	30	副臂安装角度 Jib angle(°)
工作幅度 Working radius(m)					工作幅度 Working radius(m)
16	17.3				16
18	16.8		9.7		18
20	16.3	14.7	9.5		20
22	15.8	14.2	9.3		22
24	14.7	13.8	9.2	7.9	24
26	13.7	13.4	9	7.9	26
28	12.8	12.8	8.4	7.7	28
30	12	12	7.8	7.7	30
32	11.2	11.2	7.1	7.1	32
34	10.2	10.4	6.6	6.6	34
36	9.3	9.6	6.1	6.1	36
38	8.4	8.7	5.6	5.6	38
40	7.7	8	5.2	5.2	40
42	7	7.3	4.7	4.7	42
44	6.4	6.7	4.4	4.4	44
46	5.9	6.1	4	4	46
48	5.4	5.6	3.7	3.7	48
50	5	5.1	3.4	3.4	50
52	4.5	4.7	3.2	3.2	52
54	4.1	4.3	2.9	2.9	54
56	3.7	3.9	2.7	2.7	56
58	3.4	3.5	2.5	2.5	58
60	3	3.1	2.3	2.3	60
62	2.7	2.8	2.1	2.1	62
64	2.4	2.5	1.8	1.8	64
66	2.1	2.2			66
68	1.9	1.9			68
配重Counterweight	45+6	45+6	45+6	45+6	配重Counterweight


**主要零部件**  
**Main parts**

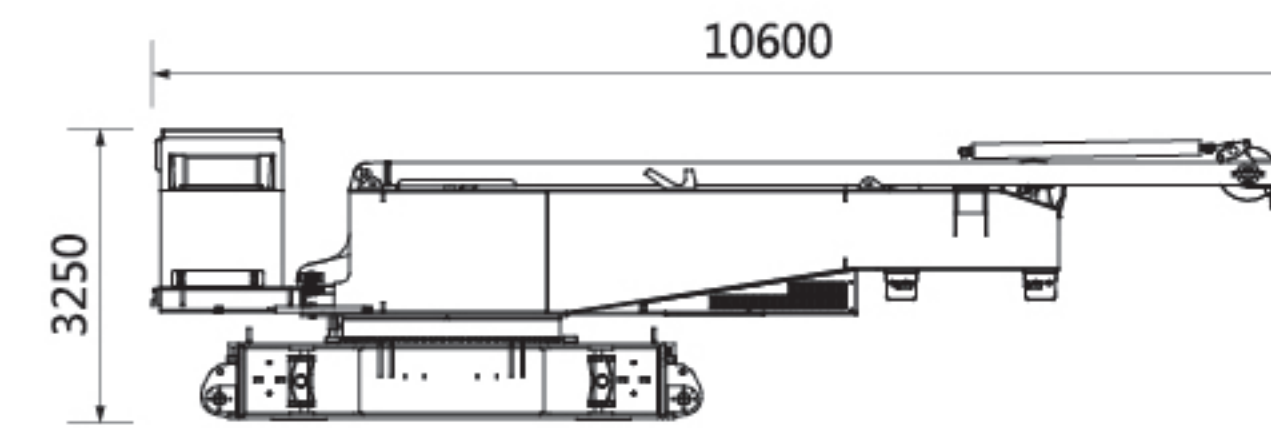


主机运输方案 1 Basic machine transport plan 1		×1
长(L)	10600mm	
宽(W)	3000mm	
高(H)	3250mm	
重量(W)	32.3t	

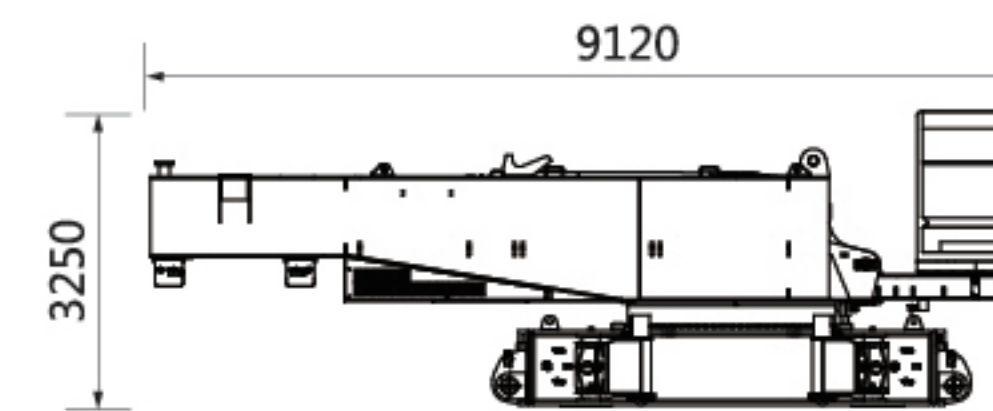


主机运输方案 2 Basic machine transport plan 2		×1
长(L)	9120mm	
宽(W)	3000mm	
高(H)	3250mm	
重量(W)	29.2t	

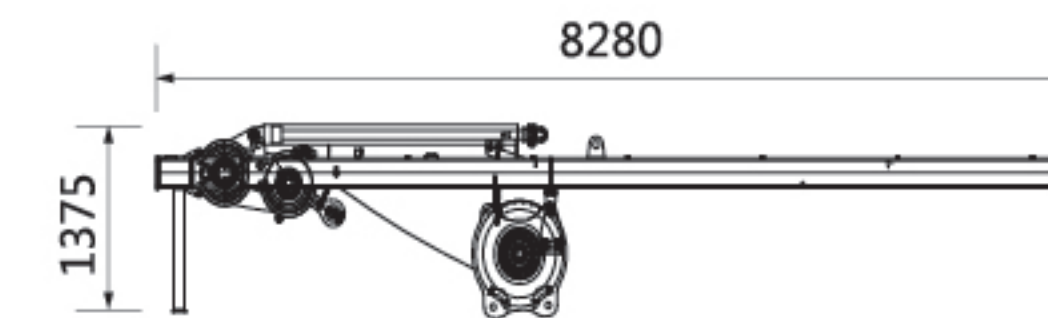

桅杆单独运输组件 Mast transport parts		×1
长(L)	8280mm	
宽(W)	1660mm	
高(H)	1375mm	
重量(W)	3.1t	

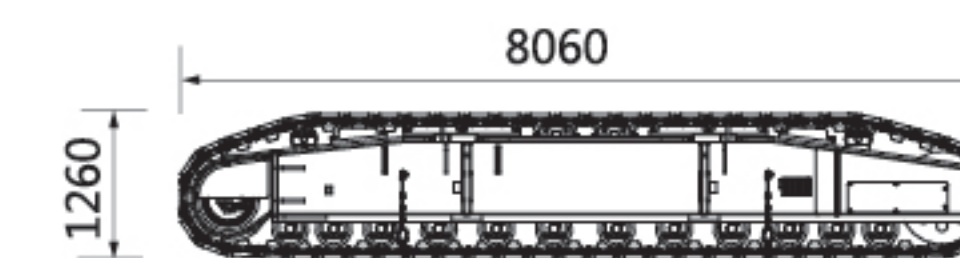


履带架 Track frame		×2
长(L)	8060mm	
宽(W)	1100mm	
高(H)	1260mm	
重量(W)	13.9t	

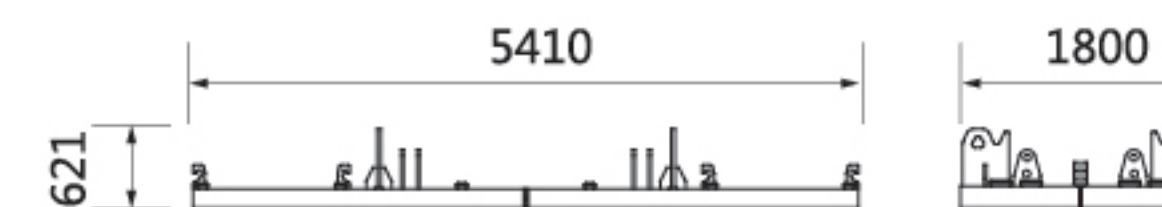


平衡重托盘 Counterweight tray		×1
长(L)	5410mm	
宽(W)	1800mm	
高(H)	621mm	
重量(W)	15t	




主要零部件  
Main parts

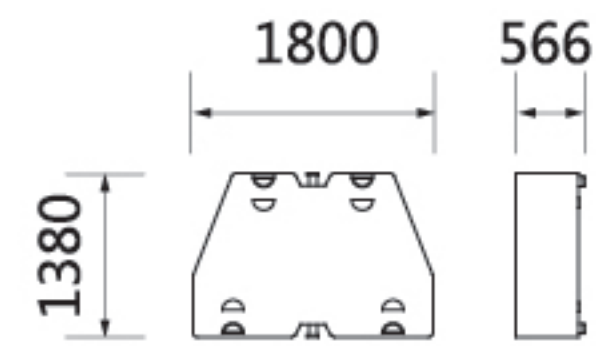


上车平衡重I Upper Counterweight I	×6
长(L)	1800mm
宽(W)	1380mm
高(H)	566mm
重量(W)	5.0t

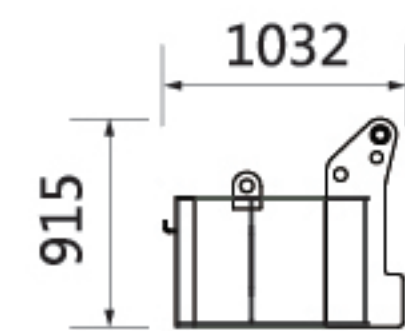


平衡重托架 Counterweight bracket	×2
长(L)	1032mm
宽(W)	1560mm
高(H)	915mm
重量(W)	3.0 t

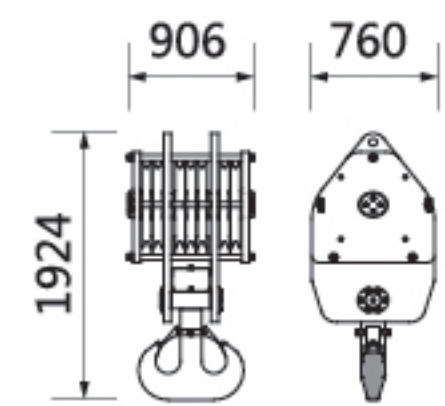


130t吊钩(选配) 130t hook block(Optional)	×1
长(L)	906mm
宽(W)	760mm
高(H)	1924mm
重量(W)	2.0t

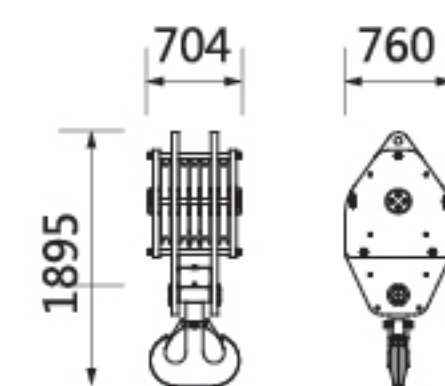


100t吊钩 100t hook block	×1
长(L)	704mm
宽(W)	760mm
高(H)	1895mm
重量(W)	1.67t

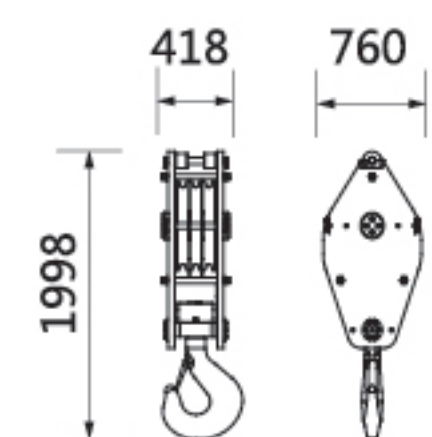


80t吊钩 80t hook block	×1
长(L)	418mm
宽(W)	760mm
高(H)	1998mm
重量(W)	0.95t

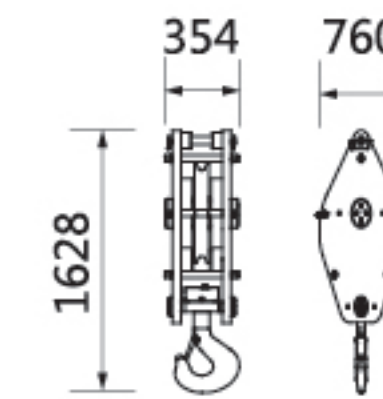


32t吊钩 32t hook block	×1
长(L)	354mm
宽(W)	760mm
高(H)	1628mm
重量(W)	0.7t




13.5t吊钩 13.5t hook block	×1
长(L)	485mm
宽(W)	485mm
高(H)	796mm
重量(W)	0.5t

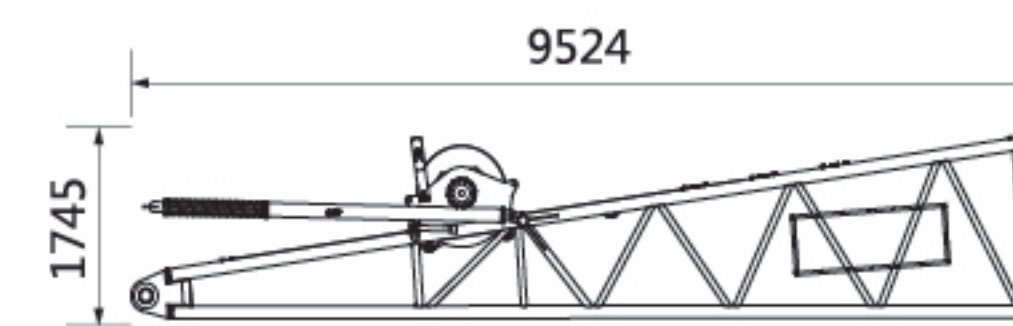

主臂9m底节臂 (含副卷及钢丝绳) 9m boom butt	×1
长(L)	9524mm
宽(W)	2226mm
高(H)	1745mm
重量(W)	4.6t

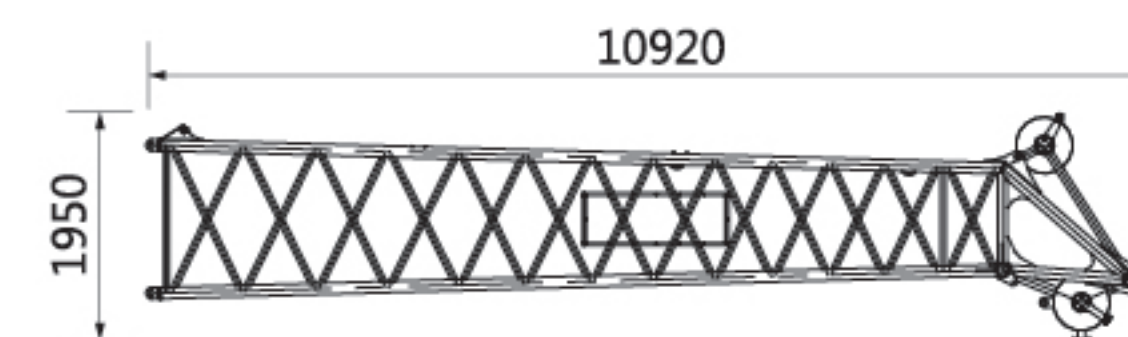


主臂10m顶节臂 10m boom top	×1
长(L)	10920mm
宽(W)	1920mm
高(H)	1950mm
重量(W)	2.45t

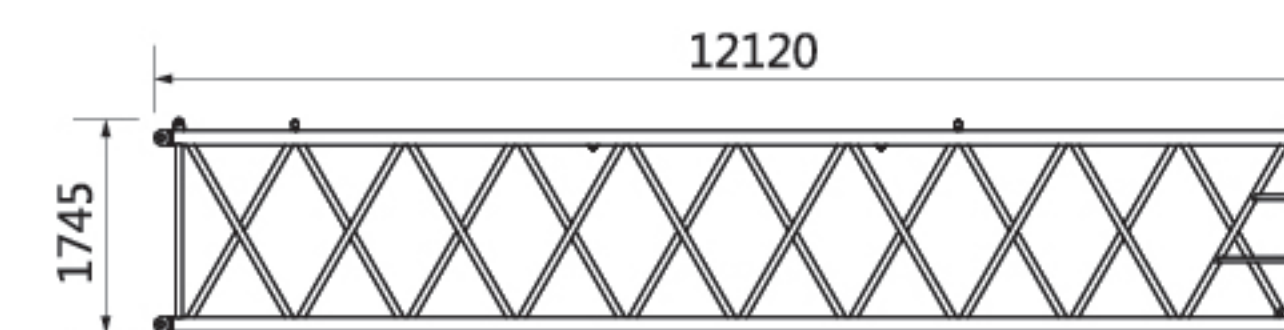


主臂12m中间节 12m boom insert section	×4
长(L)	12120mm
宽(W)	1920mm
高(H)	1745mm
重量(W)	1.45t




## 主要零部件 Main parts

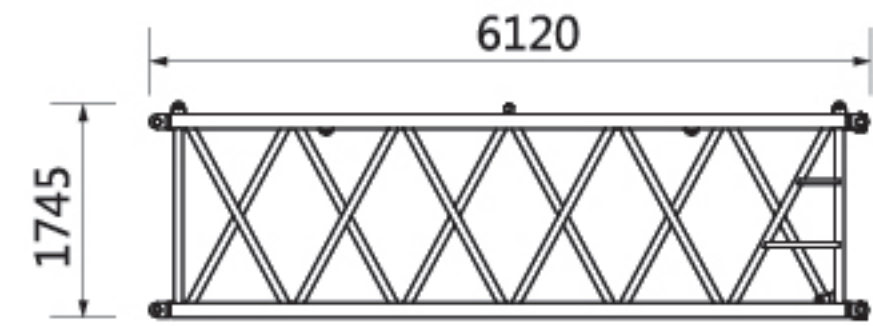


主臂6m中间节 6m boom insert section	×1
长(L)	6120mm
宽(W)	1920mm
高(H)	1745mm
重量(W)	0.85t

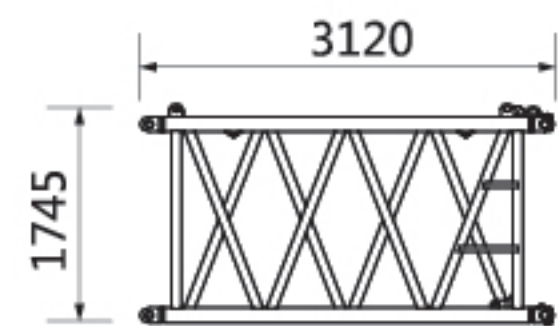


主臂3m中间节 3m boom insert section	×1
长(L)	3120mm
宽(W)	1920mm
高(H)	1745mm
重量(W)	0.5t

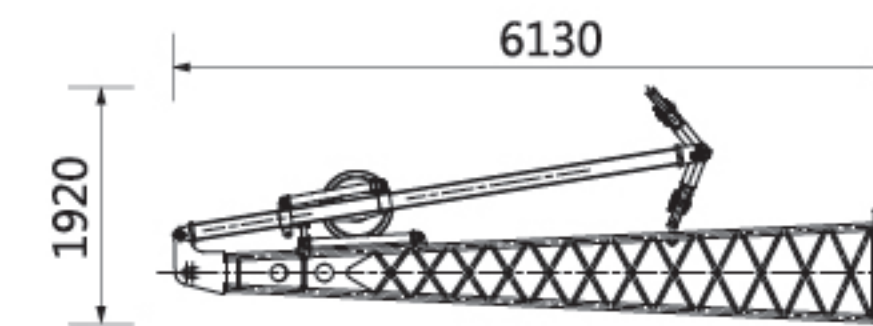


固定副臂底节 (含支架) Fixed jib butt(including strut)	×1
长(L)	6130mm
宽(W)	1165mm
高(H)	1920mm
重量(W)	0.86t

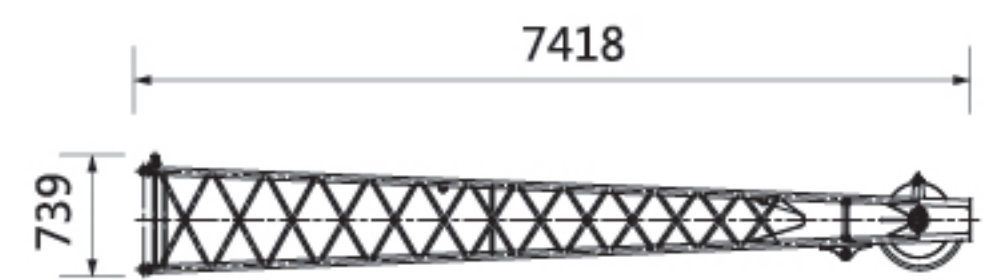

固定副臂顶节 Fixed jib top	×1
长(L)	7418mm
宽(W)	875mm
高(H)	739mm
重量(W)	0.41t

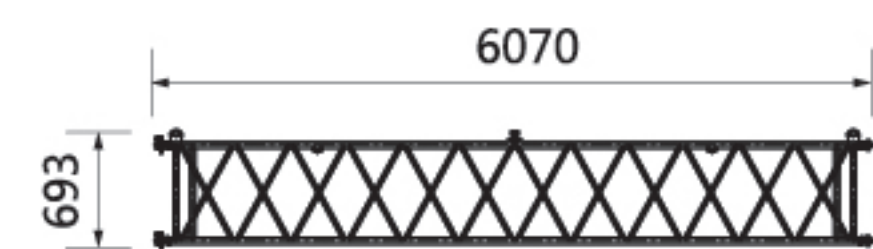

固定副臂6m中间节 Fixed jib 6m insert section	×2
长(L)	6070mm
宽(W)	875mm
高(H)	693mm
重量(W)	0.24t

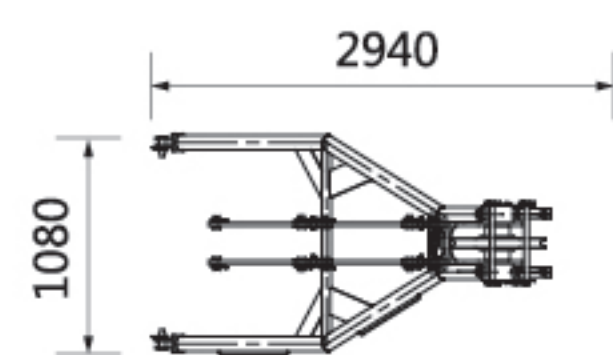

臂端单滑轮 Boom end pulley assembly	×1
长(L)	2940mm
宽(W)	1500mm
高(H)	1080mm
重量(W)	0.3t

## 工作条件及注意 Working conditions and Cautions

### 工作条件及注意

- 本起重机的的工作条件为：臂长≤50m时风速小于13.8m/s,臂长>50m时风速小于8.3m/s,环境温度-20℃~+40℃,地面倾斜度小于1%；
- 载荷表中的额定起重量,是指在满足给定的工作条件下,重物自由悬挂,在坚实地面缓慢起吊重物,起重机不行走时的最大起重量。作业者须视各种不良条件(如地面松软或不平、风力、侧面负荷、摆动作用、多台起重机合力起吊等)限制或降低起重机的起重量；
- 载荷表中额定起重量包括主吊钩、钢丝绳、和其它所有吊具的重量,安装臂端单滑轮时,还包括臂端单滑轮机构、13.5t副钩及钢丝绳重量。各吊钩及臂端单滑轮的重量见下表：

130t吊钩	100t吊钩	80t吊钩	32吊钩	13.5t吊钩	臂端单滑轮
2.04吨	1.67吨	0.95吨	0.70吨	0.50吨	0.3吨

- 载荷表中没有列出额定载荷值的空白区为非工作区,起重机不允许在该区域内进行起重作业；
- 表中起重量为带上车全配重和下车全配重的起重量；
- 臂端单滑轮机构工作时,最大起重量按臂端单滑轮载荷表,注意应减去副钩(0.5t)、钢丝绳及吊具的重量,但不需要减去主钩及钢丝绳的重量,也不必减去臂端单滑轮的重量。
- 本机允许带载低档行驶,最大带载量为载荷表中额定载荷的90%,如需转弯行驶,最大带载量为载荷表中额定载荷的70%。
- 吊钩及倍率的选取  
在任何情况下,吊钩的选取必须满足吊钩的额定起重量大于或等于实际吊重量(包括钢丝绳及吊具等)。

倍率 n	1	2	3	4	5	6	7	8	9	10	11	12
可吊重量	13.0	25.7	38.2	50.5	62.5	74.2	85.7	97.0	108.1	118.9	129.5	130.0

单倍率用于臂端单滑轮。

### Working conditions and Cautions

- The crane working conditions: boom length ≤50m when wind speed is less than 13.8m/s; boom length>50m when wind speed is less than 8.3m/s; the ambient temperature is -20℃~+40℃; and the ground gradient is less than 1%.
- The rated lifting load in the chart are the maximum lifting capacity on the condition that the given working conditions are met and the load is in the state of free suspension and lifted slowly from the solid ground. Operators should limit or reduce lifting capacity according to different conditions (such as soft or uneven ground, wind force, side loading, oscillating action, several crane cooperate-lifting).
- The rated lifting capacity in the chart includes the weight of main hook block, wire rope and all slings. When single top is attached on boom head, the rated lifting capacity also includes the weight of boom single top, 13.5t capacity auxiliary hook block and wire rope. The weight of each hook block and boom single top is shown in the table below:

130t吊钩	100t吊钩	80t吊钩	32吊钩	13.5t吊钩	臂端单滑轮
2.04吨	1.67吨	0.95吨	0.70吨	0.50吨	0.3吨

- The blank area of the chart where no rated lifting load listed is regarded as non-operation area, so crawler crane is not allowed to carry out lifting operation in this area.
- The lifting load in the chart includes the lifting capacity of full counterweight on both crane superstructure and crane undercarriage.
- When boom single top works, its maximum lifting capacity is according to the boom single top lifting load chart, and it is necessary to reduce the weight of auxiliary hook (0.5t), wire rope and slings, but it is not necessary to reduce the weight of main hook block and wire rope as well as the weight of boom single top.
- This crawler crane is allowed to travel slowly with a suspended load, the maximum load weight is 90% of rated lifting load given in the load chart, but the maximum load weight is 70% of rated lifting load given in the load chart for the crane turning around.
- Selection of hook block and parts of line  
In any case, the selection of hook block must satisfy that the hook block rated lifting load is more than or equal to the actual lifting load (including wire rope, slings and etc.).

倍率 n	1	2	3	4	5	6	7	8	9	10	11	12
可吊重量	13.0	25.7	38.2	50.5	62.5	74.2	85.7	97.0	108.1	118.9	129.5	130.0

The one part of line is used for boom single top.