


永茂建机
YONGMAO

STT1830
64t


平頭系列

STT1830
64t

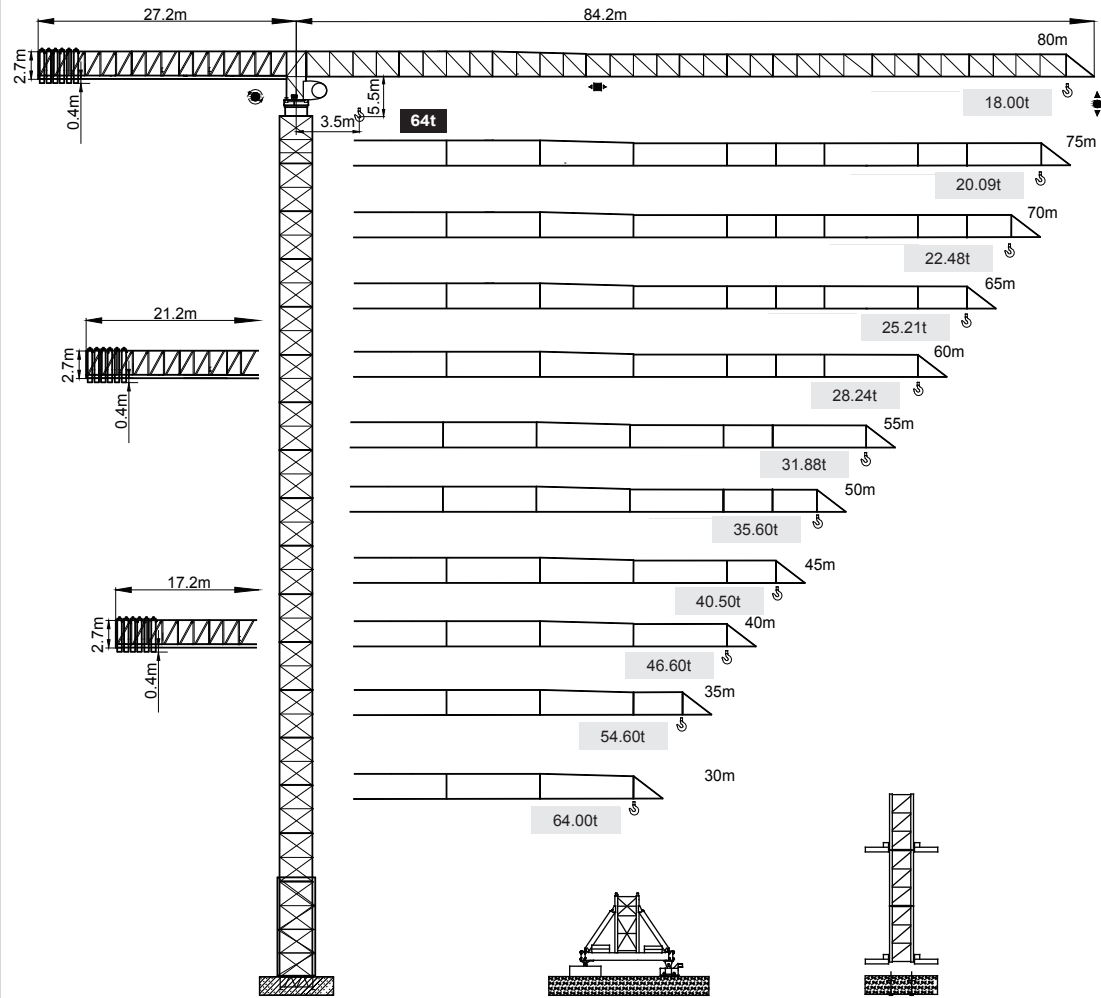

載荷表 Load Chart

R (m)	倍率 Fall	R(Cmax) (m)	Cmax (t)	20	25	30	35	40	45	50	55	60	65	70	75	80
80	UU	28.36	64.00	64.00	64.00	59.96	50.04	42.67	36.98	32.46	28.77	25.71	23.13	20.92	19.02	17.35
	U	51.40	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	29.42	26.36	23.78	21.57	19.67	18.00
75	UU	28.80	64.00	64.00	64.00	61.05	50.97	43.48	37.70	33.10	29.36	26.25	23.62	21.38	19.44	
	U	52.22	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	30.01	26.90	24.27	22.03	20.09	
70	UU	29.24	64.00	64.00	64.00	62.12	51.89	44.28	38.41	33.74	29.93	26.77	24.11	21.83		
	U	53.02	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	30.58	27.42	24.76	22.48		
65	UU	29.65	64.00	64.00	64.00	63.13	52.75	45.03	39.07	34.33	30.47	27.27	24.57			
	U	53.77	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	31.12	27.92	25.21			
60	UU	29.91	64.00	64.00	64.00	63.78	53.30	45.51	39.50	34.72	30.82	27.59				
	U	54.26	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	31.47	28.24				
55	UU	30.22	64.00	64.00	64.00	64.00	53.95	46.08	40.00	35.17	31.23					
	U	54.83	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	31.88					
50	UU	30.51	64.00	64.00	64.00	64.00	54.55	46.60	40.47	35.60						
	U	50.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00					
45	UU	30.51	64.00	64.00	64.00	64.00	54.55	46.60	40.50							
	U	45.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00						
40	UU	30.51	64.00	64.00	64.00	64.00	54.55	46.60	40.60							
	U	40.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00						
35	UU	30.53	64.00	64.00	64.00	64.00	54.60									
	U	35.00	32.00	32.00	32.00	32.00	32.00	32.00								
30	UU	35.00	64.00	64.00	64.00	64.00										
	U	30.00	32.00	32.00	32.00	32.00	32.00									
25*	UU	25.00	64.00	64.00	64.00											
	U	25.00	32.00	32.00	32.00	32.00										

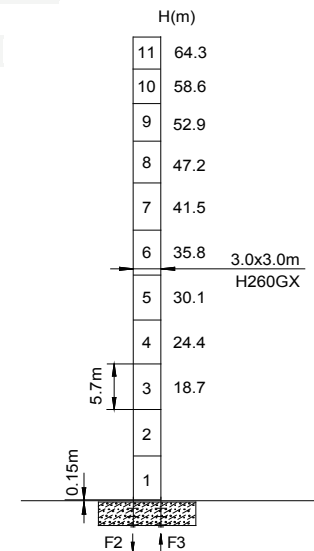

	●	■
F2	736t	490t
F3	452t	727t
⊕	387t	

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
 ⊕ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Topless STT1830

0 0
0 0
3 4

Topless

V 5.0-09032018

Topless STT1830

Topless STT1830



CE FEM



YONGMAO HOLDINGS LIMITED






YONGMAO HOLDINGS LIMITED


STT1830 64t

STT1830 64t

平頭系列

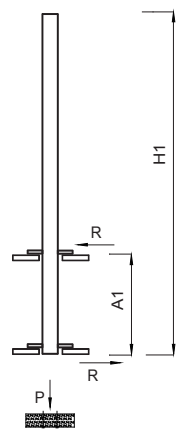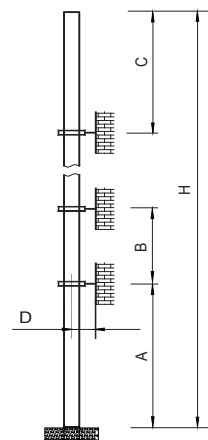

內爬框外廓尺寸
Overall dimensions of the internal climbing frame



內爬開口尺寸
Dimensions of the internal climbing opening

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
H260GX	48	36	48	>5.0	200 >200*

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
H260GX	*	*	*	*	*	*	*	*

附著道數 Number of tie collars $= (H-A-C)/B+1$

超過100m高度，需降低載荷，請與公司聯繫。 Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

主要性能參數 Specifications

機構 Mechanism	U		U		電動機 Motor kW
	m/min	t	m/min	t	
 200LFV160DBA	0-36	32.0	0-18	64.0	 1100m >1100m*
	0-50	20.0	0-25	50.0	
	0-72	12.0	0-36	24.0	
 24DFV33	0-25 m/min			24	
 18RFCV	0-0.3 rpm			2x18.5	
 RT	*			*	

電壓 Voltage	kVA
380V(±10%) 60 Hz/50 Hz	285

* 與製造商聯繫 Contact us, please.
☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

0 0
5 6

Topless STT1830
Topless STT1830



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED